

Pensieve header: A fresh implementation of baby DoPeGDO. Continues pensieve://2020-09/, pensieve://2020-03/Testing123.nb, and pensieve://People/VanDerVeen/TimidHeisenbergRGeneralForm@.nb.

$\mathbb{E}[\omega, Q, P_{\epsilon}\text{Series}]$  represents  $\omega e^{Q+P}$ , where  $\omega$  is a scalar,  $Q$  is an  $\epsilon$ -free quadratic, and  $P = \sum_{k=0}^{\infty} P[k] \epsilon^k$  is a perturbation (it is ill-advised to include  $\omega$  in  $P$  because then it will have log terms).

Scheme:  $\mathbb{E}_{[]} // \mathbb{E}_{[]}$  calls FZip or Zip, which are functionally the same. Zip works by handling the quadratic part and calling PZip for the perturbation-only part. PZip works by iteratively solving the synthesis equation. FZip works by encapsulating coefficients, calling Zip, and back-substituting.

## Initialization, minor utilities, and “Define” Code

```
SetDirectory["C:\\drorbn\\AcademicPensieve\\Projects\\BabyDoPeGDO"];
Once[<< KnotTheory`];
Once[Get@"..\\Profile\\Profile.m"];
```

Loading KnotTheory` version of February 2, 2020, 10:53:45.2097.  
Read more at <http://katlas.org/wiki/KnotTheory>.

This is Profile.m of <http://www.drorbn.net/AcademicPensieve/Projects/Profile/>.

This version: April 2020. Original version: July 1994.

In[1]:=

```
$k=1;
```

In[2]:=

```
CCF[ε_] := ExpandDenominator@ExpandNumerator@Together[ε];
CF[ε_List] := CF /@ ε;
CF[ε_εSeries] := CF /@ ε;
CF[ε_] := PPCF@Module[
  {vs = Cases[ε, (y | x | η | ε)_, ∞] ∪ {y | x | η | ε}],
   Total[CoefficientRules[Expand[ε], vs] /. (ps_ → c_) ↦ CCF[c] (Times @@ vsps)]
  ];
(*CF[ε_]:=PPCF@CCF[ε];*)
CF[ε_E] := CF /@ ε;
CF[Esp_[εsp__]] := CF /@ Esp[εsp];
```

In[3]:=

```
eSeries /: S1_eSeries ≡ S2_eSeries := 
  Length[S1] == Length[S2] ∧ Inner[CF[#1] == CF[#2] &, S1, S2, And];
eSeries[0] := eSeries @@ Table[0, $k + 1];
eSeries /: S1_eSeries + S2_eSeries :=
  eSeries @@ Table[S1[[k]] + S2[[k]], {k, Min[Length@S1, Length@S2]}];
eSeries /: S1_eSeries * S2_eSeries := eSeries @@
  Table[Sum[S1[[j + 1]] * S2[[k - j + 1]], {j, 0, k}], {k, 0, Min[Length@S1, Length@S2] - 1}];
eSeries /: c_* S_eSeries := (c #) & /@ S;
eSeries /: ∂vs S_eSeries := (s ↦ ∂vs s) /@ S;
```

Define[lhs = rhs, ...] defines the lhs to be rhs, except that rhs is computed only once for each value of

\$k. Fancy Mathematica not for the faint of heart. Most readers should ignore.

```
In[]:= SetAttributes[Define, HoldAll];
Define[def_, defs__] := (Define[def]; Define[defs]);
Define[op_is_ = ε_] := Module[{SD, ii, jj, kk, isp, nis, nisp, sis}, Block[{i, j, k},
  ReleaseHold[Hold[
    SD[op_nisp,$k_Integer, Block[{i, j, k}, op_isp,$k = ε; op_nis,$k]];
    SD[op_isp, op_{is},$k]; SD[op_sis__, op_{sis}]];
   ] /. {SD → SetDelayed,
     isp → {is} /. {i → i_, j → jj_, k → kk_},
     nis → {is} /. {i → ii, j → jj, k → kk},
     nisp → {is} /. {i → ii_, j → jj_, k → kk_}
   }] ]]
```

## The Basic Tensors

```
In[]:= Define[m_{i,j→k}=EE_{i,j}→{k}[1, -ξ_i η_j + (η_i + η_j) y_k + (ξ_i + ξ_j) x_k, eSeries[0]]]
```

```
In[]:= AllMonomials[{}, 0] = {1};
AllMonomials[{}, d_Integer] /; d > 0 := {};
AllMonomials[{v_, vs___}, d_Integer] :=
  Join @@ Table[v^{d-k} AllMonomials[{vs}, k], {k, 0, d}];
AllMonomials[vs_List, {d_}] := Join @@ Table[AllMonomials[vs, k], {k, 0, d}];
```

```
In[]:= Basis[js_List, m_]:= Flatten@Outer[Times,
  AllMonomials[Table[y_j, {j, js}], m], AllMonomials[Table[x_j, {j, js}], m]];
Basis[js_List, {m_}] := Flatten@Table[Basis[js, k], {k, 0, m}]
```

```
In[]:= Basis[{i, j}, {2}]
```

```
Out[]= {1, x_i y_i, x_j y_i, x_i y_j, x_j y_j, x_i^2 y_i^2, x_i x_j y_i^2, x_j^2 y_i^2, x_i^2 y_i y_j, x_i x_j y_i y_j, x_j^2 y_i y_j, x_i^2 y_j^2, x_i x_j y_j^2, x_j^2 y_j^2}
```

```
In[]:= GenericCombination[bas_, c_] := bas.Table[c_j, {j, Length@bas}];
GenericCombination[bas_, c_{k_}] := bas.Table[c_{k,j}, {j, Length@bas}];
```

```
In[]:= GenericCombination[Basis[{i, j}, {2}], c1]
```

```
Out[]= c_{1,1} + x_i y_i c_{1,2} + x_j y_i c_{1,3} + x_i y_j c_{1,4} + x_j y_j c_{1,5} + x_i^2 y_i^2 c_{1,6} + x_i x_j y_i^2 c_{1,7} + x_j^2 y_i^2 c_{1,8} +
x_i^2 y_i y_j c_{1,9} + x_i x_j y_i y_j c_{1,10} + x_j^2 y_i y_j c_{1,11} + x_i^2 y_j^2 c_{1,12} + x_i x_j y_j^2 c_{1,13} + x_j^2 y_j^2 c_{1,14}
```

```
In[1]:= Ri_,j_ := E{}→{i,j} [1, (-1 + T) xj (yi - yj), 
  eSeries @@ Prepend[0] @Table[GenericCombination[Basis[{i, j}, {k + 1}], ck], {k, $k}]];
R̄i_,j_ := E{}→{i,j} [1, (1 - 1 + T) xj (yi - yj),
  eSeries @@ Prepend[0] @Table[GenericCombination[Basis[{i, j}, {k + 1}], dk], {k, $k}]];
CCi_ := E{}→{i} [Sqrt[T], 0, eSeries @@ Prepend[0] @
  Table[GenericCombination[Basis[{i}, {k + 1}], ek], {k, $k}]];
CC̄i_ := E{}→{i} [1/Sqrt[T], 0, eSeries @@ Prepend[0] @
  Table[GenericCombination[Basis[{i}, {k + 1}], fk], {k, $k}]];
```

In[2]:= {R<sub>1,2</sub>, R̄<sub>1,2</sub>, CC<sub>1</sub>, CC̄<sub>1</sub>}

Out[2]= {E<sub>{}</sub>→{1,2} [1, (-1 + T) x<sub>2</sub> (y<sub>1</sub> - y<sub>2</sub>), 
 eSeries [0, c<sub>1,1</sub> + x<sub>1</sub> y<sub>1</sub> c<sub>1,2</sub> + x<sub>2</sub> y<sub>1</sub> c<sub>1,3</sub> + x<sub>1</sub> y<sub>2</sub> c<sub>1,4</sub> + x<sub>2</sub> y<sub>2</sub> c<sub>1,5</sub> + x<sub>1</sub><sup>2 y<sub>1</sub><sup>2</sup> c<sub>1,6</sub> + x<sub>1</sub> x<sub>2</sub> y<sub>1</sub><sup>2</sup> c<sub>1,7</sub> + x<sub>2</sub><sup>2</sup> y<sub>1</sub><sup>2</sup> c<sub>1,8</sub> + 
 x<sub>1</sub><sup>2</sup> y<sub>1</sub> y<sub>2</sub> c<sub>1,9</sub> + x<sub>1</sub> x<sub>2</sub> y<sub>1</sub> y<sub>2</sub> c<sub>1,10</sub> + x<sub>2</sub><sup>2</sup> y<sub>1</sub> y<sub>2</sub> c<sub>1,11</sub> + x<sub>1</sub><sup>2</sup> y<sub>2</sub><sup>2</sup> c<sub>1,12</sub> + x<sub>1</sub> x<sub>2</sub> y<sub>2</sub><sup>2</sup> c<sub>1,13</sub> + x<sub>2</sub><sup>2</sup> y<sub>2</sub><sup>2</sup> c<sub>1,14</sub>], 
 E<sub>{}</sub>→{1,2} [1, (1 - 1 + T) x<sub>2</sub> (y<sub>1</sub> - y<sub>2</sub>), eSeries [0, d<sub>1,1</sub> + x<sub>1</sub> y<sub>1</sub> d<sub>1,2</sub> + x<sub>2</sub> y<sub>1</sub> d<sub>1,3</sub> + 
 x<sub>1</sub> y<sub>2</sub> d<sub>1,4</sub> + x<sub>2</sub> y<sub>2</sub> d<sub>1,5</sub> + x<sub>1</sub><sup>2</sup> y<sub>1</sub><sup>2</sup> d<sub>1,6</sub> + x<sub>1</sub> x<sub>2</sub> y<sub>1</sub><sup>2</sup> d<sub>1,7</sub> + x<sub>2</sub><sup>2</sup> y<sub>1</sub><sup>2</sup> d<sub>1,8</sub> + x<sub>1</sub><sup>2</sup> y<sub>1</sub> y<sub>2</sub> d<sub>1,9</sub> + 
 x<sub>1</sub> x<sub>2</sub> y<sub>1</sub> y<sub>2</sub> d<sub>1,10</sub> + x<sub>2</sub><sup>2</sup> y<sub>1</sub> y<sub>2</sub> d<sub>1,11</sub> + x<sub>1</sub><sup>2</sup> y<sub>2</sub><sup>2</sup> d<sub>1,12</sub> + x<sub>1</sub> x<sub>2</sub> y<sub>2</sub><sup>2</sup> d<sub>1,13</sub> + x<sub>2</sub><sup>2</sup> y<sub>2</sub><sup>2</sup> d<sub>1,14</sub>], 
 E<sub>{}</sub>→{1} [Sqrt[T], 0, eSeries [0, e<sub>1,1</sub> + x<sub>1</sub> y<sub>1</sub> e<sub>1,2</sub> + x<sub>1</sub><sup>2</sup> y<sub>1</sub><sup>2</sup> e<sub>1,3</sub>]], 
 E<sub>{}</sub>→{1} [1/Sqrt[T], 0, eSeries [0, f<sub>1,1</sub> + x<sub>1</sub> y<sub>1</sub> f<sub>1,2</sub> + x<sub>1</sub><sup>2</sup> y<sub>1</sub><sup>2</sup> f<sub>1,3</sub>]]}</sup>

## The Main Program

Variables and their duals:

```
In[3]:= {y*, x*, η*, ε*} = {η, ε, y, x};
(vs_List)* := (v ↪ v*) /@ vs;
(ui_)* := (u*)i;
```

E operations:

```
In[4]:= E /: E[w1_, Q1_, P1_] ≡ E[w2_, Q2_, P2_] := CF[w1 == w2] ∧ CF[Q1 == Q2] ∧ (P1 ≡ P2);
E /: E[w1_, Q1_, P1_] × E[w2_, Q2_, P2_] := E[w1 w2, Q1 + Q2, P1 + P2];
Ed1_→r1_ [ε1s___] ≡ Ed2_→r2_ [ε2s___] ^:= (d1 == d2) ∧ (r1 == r2) ∧ (E[ε1s] ≡ E[ε2s]);
Ed1_→r1_ [ε1s___] Ed2_→r2_ [ε2s___] ^:= E(d1 Union d2)→(r1 Union r2) @@ (E[ε1s] × E[ε2s]);
Edr_ [εs___] $k_ := Edr @@ E[εs]$k;
```

```
In[✓]:= Ed1_>r1_ [E1s___] // Ed2_>r2_ [E2s___] := Module[{is = r1  $\cap$  d2, lvs},  
  lvs = Flatten@Table[{X$@i, y@i}, {i, is}];  
  E[d1 $\cup$ Complement[d2, is]]  $\rightarrow$  (r2 $\cup$ Complement[r1, is]) @@ (Ziplvs $\cup$ lvs*[lvs*.lvs, Times[  
    E[E1s] /. Table[{v : x | y]i  $\rightarrow$  v$@i, {i, is}],  
    E[E2s] /. Table[{v : ξ | η]i  $\rightarrow$  v$@i, {i, is}]  
  ]])  
]
```

$$[F: \mathcal{E}]_B := \mathbb{E}^{\frac{1}{2} \sum_{i,j \in B} F_{ij} \partial_{z_i} \partial_{z_j}} \mathcal{E} \quad \text{and} \quad \langle F: \mathcal{E} \rangle_B := [F: \mathcal{E}]_B|_{z_B \rightarrow 0},$$

where  $\mathcal{E}$  is a docile perturbed Gaussian. The following lemma allows us to restrict to the case where  $\mathcal{E}$  has no  $B$ - $B$  quadratic part:

**Lemma 1.** With convergences left to the reader,

$$\left\langle F: \mathcal{E} \mathbb{E}^{\frac{1}{2} \sum_{i,j \in B} G_{ij} z_i z_j} \right\rangle_B = \det(1 - GF)^{-1/2} \left\langle F(1 - GF)^{-1}: \mathcal{E} \right\rangle_B.$$


The next lemma dispatches the case where  $\mathcal{E}$  has a  $B$ -linear part:

$$\text{Lemma 2. } \left\langle F: \mathcal{E} \mathbb{E}^{\sum_{i \in B} y_i z_i} \right\rangle_B = \mathbb{E}^{\frac{1}{2} \sum_{i,j \in B} F_{ij} y_i y_j} \left\langle F: \mathcal{E}|_{z_B \rightarrow z_B + Fy_B} \right\rangle_B.$$

Finally, we deal with the docile perturbation case:

**Lemma 3.** With an extra variable  $\lambda$ ,  $Z_\lambda := \log[\lambda F: \mathbb{E}^P]_B$  satisfies and is determined by the following PDE / IVP:

$$Z_0 = P \quad \text{and} \quad \partial_\lambda Z_\lambda = \frac{1}{2} \sum_{i,j \in B} F_{ij} (\partial_{z_i} \partial_{z_j} Z_\lambda + (\partial_{z_i} Z_\lambda)(\partial_{z_j} Z_\lambda)).$$

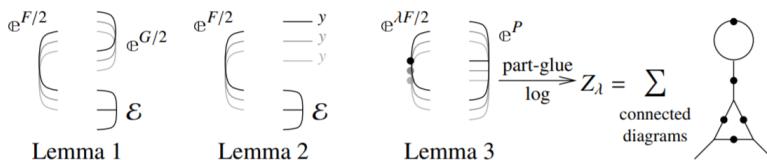

```
In[✓]:= Zipvs_ [F_, E_] := <F, E> // Zip1vs // Zip2vs // Zip3vs
```

Getting rid of the quadratic.

**Lemma 1.** With convergences left to the reader,

$$\left\langle F: \mathcal{E} \mathbb{E}^{\frac{1}{2} \sum_{i,j \in B} G_{ij} z_i z_j} \right\rangle_B = \det(1 - GF)^{-1/2} \left\langle F(1 - GF)^{-1}: \mathcal{E} \right\rangle_B$$

```
In[✓]:= Zip1{} = Identity;  
Zip1vs_@<F, E[w_, Q_, P_] := PPZip1@Module[{T, F, G, u, v},  
  I = IdentityMatrix@Length@vs;  
  F = Table[∂u,vF, {u, vs*}, {v, vs*}];  
  G = Table[∂u,vQ, {u, vs}, {v, vs}];  
  CF /@ <vs*.F.Inverse[I - G.F].vs* / 2,  
  E[PowerExpand@Factor[w Det[I - G.F]-1/2, Q - vs.G.vs / 2, P]]
```

Getting rid of linear terms.

$$\text{Lemma 2. } \left\langle F: \mathcal{E} \mathbb{E}^{\sum_{i \in B} y_i z_i} \right\rangle_B = \mathbb{E}^{\frac{1}{2} \sum_{i,j \in B} F_{ij} y_i y_j} \left\langle F: \mathcal{E}|_{z_B \rightarrow z_B + Fy_B} \right\rangle_B.$$

```
In[1]:= Zip2[] = Identity;
Zip2[_vs_] := PPZip2@Module[{F, Y, u, v},
  F = Table[\partial_{u,v} F, {u, vs*}, {v, vs*}];
  Y = Table[\partial_v Q, {v, vs}];
  CF /@ <F, E[w, Q - Y.vs + Y.F.Y/2, P /. Thread[v \rightarrow vs + F.Y]]>
]
```

Dealing with Feynman diagrams.

**Lemma 3.** With an extra variable  $\lambda$ ,  $Z_\lambda := \log[\lambda F : \oplus^P]_B$  satisfies and is determined by the following PDE / IVP:

$$Z_0 = P \quad \text{and} \quad \partial_\lambda Z_\lambda = \frac{1}{2} \sum_{i,j \in B} F_{ij} \left( \partial_{z_i} \partial_{z_j} Z_\lambda + (\partial_{z_i} Z_\lambda)(\partial_{z_j} Z_\lambda) \right).$$

Note that the power  $m$  of  $\lambda$  is at most  $k - 1 + \frac{2k+2}{2} = 2k$ . We write  $Z_\lambda = \sum Z[m] \lambda^m$ .

```
In[2]:= Zip3[_vs_] := PPZip3@Module[{Z, u, v, m, j},
  Z[0] = P;
  For[m = 0, m < 2 $k, ++m,
    Z[m + 1] = CF[1/(2(m + 1)),
      Sum[\partial_{u*,v*} F (\partial_{u,v} Z[m] + Sum[(\partial_u Z[j]) (\partial_v Z[m - j]), {j, 0, m}], {u, vs}, {v, vs}]],
    ];
    E[w, Q, CF[Sum[Z[m], {m, 0, 2 $k}] /. Table[v \rightarrow 0, {v, vs}]]]
  ]
```

## Solving for R, CC, \$k = 1

```
In[3]:= $k = 1;
{R1,2, CC1}
unknowns = Cases[{R1,2, Rbar1,2, CC1, CCbar1}, (c | d | e | f) $k, ∞] // Union
Out[3]= {E[1, (-1 + T) x2 (y1 - y2),
  ∈Series[0, c1,1 + x1 y1 c1,2 + x2 y1 c1,3 + x1 y2 c1,4 + x2 y2 c1,5 + x1^2 y1^2 c1,6 + x1 x2 y1^2 c1,7 + x2^2 y1^2 c1,8 +
    x1^2 y1 y2 c1,9 + x1 x2 y1 y2 c1,10 + x2^2 y1 y2 c1,11 + x1^2 y2^2 c1,12 + x1 x2 y2^2 c1,13 + x2^2 y2^2 c1,14],
  E[0, e1,1 + x1 y1 e1,2 + x1^2 y1^2 e1,3]}
Out[4]= {c1,1, c1,2, c1,3, c1,4, c1,5, c1,6, c1,7, c1,8, c1,9, c1,10, c1,11, c1,12, c1,13, c1,14, d1,1, d1,2, d1,3,
  d1,4, d1,5, d1,6, d1,7, d1,8, d1,9, d1,10, d1,11, d1,12, d1,13, d1,14, e1,1, e1,2, e1,3, f1,1, f1,2, f1,3}
```

```

In[1]:= Short[errors = { (R1,2 R4,3 R5,6 // m1,4→1 // m2,5→2 // m3,6→3) [[3, -1]] -
  (R2,3 R4,5 R1,6 // m1,4→1 // m2,5→2 // m3,6→3) [[3, -1]],
  (R1,2 R3,4 // m1,3→1 // m2,4→2) [[3, -1]],
  (CC1 CC2 // m1,2→1) [[3, -1]],
  (CC3 R1,2 // m2,3→2 // m2,1→1) [[3, -1]] - (CC3 R1,2 // m1,3→1 // m1,2→1) [[3, -1]]}, 10]

Out[1]//Short= { -x3 y1 c1,3 - x2 y1 (c1,2 - T c1,2 + c1,3) + x1 y2 c1,4 + x1 y3 c1,4 -
  T x1 y3 c1,4 + T x2 y3 c1,4 + <>99>> + x32 y1 y3 (T c1,11 + 2 T c1,14 - 2 T2 c1,14) -
  x32 y2 y3 (T2 c1,11 + 2 T c1,14 - 2 T2 c1,14) - x32 y22 (T2 c1,8 + c1,14 - 2 T c1,14 + T2 c1,14) +
  x32 y12 (T2 c1,6 - 2 T3 c1,6 + T4 c1,6 + T c1,7 - 2 T2 c1,7 + T3 c1,7 + 2 c1,8 -
  4 T c1,8 + 3 T2 c1,8 + c1,11 - 2 T c1,11 + T2 c1,11 + c1,14 - 2 T c1,14 + T2 c1,14) +
  x32 y22 (T2 c1,8 + T2 c1,12 - 2 T3 c1,12 + T4 c1,12 + T c1,13 - 2 T2 c1,13 + T3 c1,13 + c1,14 - 2 T c1,14 + T2 c1,14), c1,1 + <>13>> + <>1>>, -c1,1 + <>12>> } <>1>>

In[2]:= eqns =
  Thread[θ == Union @@ (CoefficientRules[#, {x1, x2, x3, y1, y2, y3}][;;, 2] & /@ errors)]

Out[2]= {θ == c1,4 - T c1,4, θ == -c1,4 + T c1,4, θ == T c1,4 - T2 c1,4, θ == -c1,4 + 2 T c1,4 - T2 c1,4,
  θ == -T c1,4 + T2 c1,4, θ == T c1,2 - T2 c1,2 + c1,3 - T c1,3 + c1,5 - T c1,5,
  θ == -2 c1,6 + 2 T c1,6, θ == 2 T c1,6 - 2 T2 c1,6, θ == c1,9 - T c1,9,
  θ == -c1,9 + T c1,9, θ == 2 T c1,9 - 2 T2 c1,9, θ == -2 c1,9 + 4 T c1,9 - 2 T2 c1,9,
  θ == -2 T c1,9 + 2 T2 c1,9, θ == 2 T c1,6 - 2 T2 c1,6 - c1,9 + 4 T c1,9 - 4 T2 c1,9 + T3 c1,9,
  θ == 2 T c1,8 - 2 T2 c1,8 + T2 c1,9 - 2 T3 c1,9 + T4 c1,9 + T c1,10 - 2 T2 c1,10 + T3 c1,10,
  θ == 2 T c1,7 - 2 T2 c1,7 - c1,10 + 4 T c1,10 - 3 T2 c1,10 + 2 c1,11 - 2 T c1,11,
  θ == T2 c1,9 - T3 c1,9 + 2 T c1,12 - 2 T2 c1,12, θ == c1,12 - T2 c1,12, θ == -c1,12 + 2 T c1,12 - T2 c1,12,
  θ == c1,9 - 2 T c1,9 + T2 c1,9 + c1,12 - 2 T c1,12 + T2 c1,12, θ == -2 T c1,12 + 2 T2 c1,12,
  θ == -4 T c1,12 + 8 T2 c1,12 - 4 T3 c1,12, θ == -2 c1,12 + 6 T c1,12 - 6 T2 c1,12 + 2 T3 c1,12,
  θ == -2 T2 c1,12 + 2 T3 c1,12, θ == -T2 c1,12 + 2 T3 c1,12 - T4 c1,12,
  θ == -c1,12 + 4 T c1,12 - 6 T2 c1,12 + 4 T3 c1,12 - T4 c1,12, θ == -2 T c1,12 + 6 T2 c1,12 - 6 T3 c1,12 + 2 T4 c1,12,
  θ == 2 T c1,13 - 2 T2 c1,13, θ == T c1,13 - T2 c1,13, θ == 2 T c1,12 - 2 T2 c1,12 + T c1,13 - T2 c1,13,
  θ == 2 c1,8 - 2 T c1,8 + c1,10 - 2 T c1,10 + T2 c1,10 + c1,13 - 2 T c1,13 + T2 c1,13,
  θ == -2 T c1,13 + 2 T2 c1,13, θ == -2 T c1,13 + 4 T2 c1,13 - 2 T3 c1,13,
  θ == T2 c1,12 - 2 T3 c1,12 + T4 c1,12 + T c1,13 - 2 T2 c1,13 + T3 c1,13, θ == -T2 c1,13 + T3 c1,13,
  θ == -c1,13 + 4 T c1,13 - 4 T2 c1,13 + T3 c1,13 + 2 c1,14 - 2 T c1,14, θ == 2 T c1,14 - 2 T2 c1,14,
  θ == T2 c1,6 - 2 T3 c1,6 + T4 c1,6 + T c1,7 - 2 T2 c1,7 + T3 c1,7 + c1,8 - 4 T c1,8 + 3 T2 c1,8 + c1,11 -
  2 T c1,11 + T2 c1,11 + c1,14 - 2 T c1,14 + T2 c1,14, θ == -2 T c1,14 + 2 T2 c1,14, θ == c1,1 + d1,1,
  θ == c1,2 + d1,2 + d1,4 - T d1,4, θ == c1,4 + T d1,4, θ == c1,2 - c1,2}{T} + c1,3}{T} + d1,3 + d1,5 - T d1,5,
  θ == c1,4 - c1,4}{T} + c1,5}{T} + T d1,5, θ == c1,9 + T d1,9 + 2 T d1,12 - 2 T2 d1,12,
  θ == c1,12 + T2 d1,12, θ == c1,6 + d1,6 + d1,9 - T d1,9 + d1,12 - 2 T d1,12 + T2 d1,12,
```

$$\begin{aligned}
0 &= 2 c_{1,9} - \frac{2 c_{1,9}}{T} + \frac{c_{1,10}}{T} + T d_{1,10} + 2 T d_{1,13} - 2 T^2 d_{1,13}, \quad 0 = 2 c_{1,12} - \frac{2 c_{1,12}}{T} + \frac{c_{1,13}}{T} + T^2 d_{1,13}, \\
0 &= 2 c_{1,6} - \frac{2 c_{1,6}}{T} + \frac{c_{1,7}}{T} + d_{1,7} + d_{1,10} - T d_{1,10} + d_{1,13} - 2 T d_{1,13} + T^2 d_{1,13}, \\
0 &= c_{1,9} + \frac{c_{1,9}}{T^2} - \frac{2 c_{1,9}}{T} - \frac{c_{1,10}}{T^2} + \frac{c_{1,10}}{T} + \frac{c_{1,11}}{T^2} + T d_{1,11} + 2 T d_{1,14} - 2 T^2 d_{1,14}, \\
0 &= c_{1,12} + \frac{c_{1,12}}{T^2} - \frac{2 c_{1,12}}{T} - \frac{c_{1,13}}{T^2} + \frac{c_{1,13}}{T} + \frac{c_{1,14}}{T^2} + T^2 d_{1,14}, \\
0 &= c_{1,6} + \frac{c_{1,6}}{T^2} - \frac{2 c_{1,6}}{T} - \frac{c_{1,7}}{T^2} + \frac{c_{1,7}}{T} + \frac{c_{1,8}}{T^2} + d_{1,8} + d_{1,11} - T d_{1,11} + d_{1,14} - 2 T d_{1,14} + T^2 d_{1,14}, \\
0 &= -\frac{c_{1,3}}{T} + c_{1,4} + \frac{2 c_{1,8}}{T^2} - 2 c_{1,12} + e_{1,1} + e_{1,2} - \frac{e_{1,2}}{T} + 2 e_{1,3} + \frac{2 e_{1,3}}{T^2} - \frac{4 e_{1,3}}{T} - f_{1,1}, \\
0 &= e_{1,1} + f_{1,1}, \quad 0 = e_{1,2} + f_{1,2}, \quad 0 = c_{1,2} - T c_{1,2} - c_{1,3} + \frac{c_{1,3}}{T} + c_{1,4} - T c_{1,4} - c_{1,5} + \frac{c_{1,5}}{T} - \frac{2 c_{1,7}}{T} - \\
&\quad \frac{4 c_{1,8}}{T^2} + 2 T c_{1,9} + c_{1,10} - \frac{c_{1,10}}{T} - \frac{2 c_{1,11}}{T^2} + 4 T c_{1,12} + 2 c_{1,13} + \frac{e_{1,2}}{T} - \frac{4 e_{1,3}}{T^2} + \frac{4 e_{1,3}}{T} - T f_{1,2}, \\
0 &= e_{1,3} + f_{1,3}, \quad 0 = c_{1,6} - T^2 c_{1,6} + \frac{c_{1,7}}{T} - T c_{1,7} - c_{1,8} + \frac{c_{1,8}}{T^2} + c_{1,9} - T^2 c_{1,9} + \frac{c_{1,10}}{T} - \\
&\quad T c_{1,10} - c_{1,11} + \frac{c_{1,11}}{T^2} + c_{1,12} - T^2 c_{1,12} + \frac{c_{1,13}}{T} - T c_{1,13} - c_{1,14} + \frac{c_{1,14}}{T^2} + \frac{e_{1,3}}{T^2} - T^2 f_{1,3} \}
\end{aligned}$$

In[1]:= {sol} = Solve[eqns, unknowns]

**Solve:** Equations may not give solutions for all "solve" variables.

$$\begin{aligned}
Out[1]= \left\{ \begin{array}{l} c_{1,4} \rightarrow 0, \quad c_{1,5} \rightarrow -T c_{1,2} - c_{1,3}, \quad c_{1,6} \rightarrow 0, \quad c_{1,8} \rightarrow -\frac{1}{2} (1-T) c_{1,10}, \quad c_{1,9} \rightarrow 0, \\ c_{1,11} \rightarrow -T c_{1,7} - \frac{1}{2} (-1+3T) c_{1,10}, \quad c_{1,12} \rightarrow 0, \quad c_{1,13} \rightarrow 0, \quad c_{1,14} \rightarrow 0, \quad d_{1,1} \rightarrow -c_{1,1}, \quad d_{1,2} \rightarrow -c_{1,2}, \\ d_{1,3} \rightarrow -\frac{c_{1,3}}{T^2}, \quad d_{1,4} \rightarrow 0, \quad d_{1,5} \rightarrow \frac{c_{1,2}}{T} + \frac{c_{1,3}}{T^2}, \quad d_{1,6} \rightarrow 0, \quad d_{1,7} \rightarrow -\frac{c_{1,7}}{T} - \frac{(-1+T) c_{1,10}}{T^2}, \\ d_{1,8} \rightarrow -\frac{(1-T) c_{1,10}}{2 T^3}, \quad d_{1,9} \rightarrow 0, \quad d_{1,10} \rightarrow -\frac{c_{1,10}}{T^2}, \quad d_{1,11} \rightarrow \frac{c_{1,7}}{T^2} - \frac{(-1-T) c_{1,10}}{2 T^3}, \quad d_{1,12} \rightarrow 0, \\ d_{1,13} \rightarrow 0, \quad d_{1,14} \rightarrow 0, \quad e_{1,1} \rightarrow \frac{c_{1,3}}{2 T}, \quad e_{1,2} \rightarrow -\frac{c_{1,10}}{T}, \quad e_{1,3} \rightarrow 0, \quad f_{1,1} \rightarrow -\frac{c_{1,3}}{2 T}, \quad f_{1,2} \rightarrow \frac{c_{1,10}}{T}, \quad f_{1,3} \rightarrow 0 \end{array} \right\}
\end{aligned}$$

In[2]:= sol /. (a\_ → b\_) → (a = b)

$$\begin{aligned}
Out[2]= \left\{ \begin{array}{l} 0, \quad -T c_{1,2} - c_{1,3}, \quad 0, \quad -\frac{1}{2} (1-T) c_{1,10}, \quad 0, \quad -T c_{1,7} - \frac{1}{2} (-1+3T) c_{1,10}, \quad 0, \quad 0, \\ 0, \quad -c_{1,1}, \quad -c_{1,2}, \quad -\frac{c_{1,3}}{T^2}, \quad 0, \quad \frac{c_{1,2}}{T} + \frac{c_{1,3}}{T^2}, \quad 0, \quad -\frac{c_{1,7}}{T} - \frac{(-1+T) c_{1,10}}{T^2}, \quad -\frac{(1-T) c_{1,10}}{2 T^3}, \\ 0, \quad -\frac{c_{1,10}}{T^2}, \quad \frac{c_{1,7}}{T^2} - \frac{(-1-T) c_{1,10}}{2 T^3}, \quad 0, \quad 0, \quad 0, \quad \frac{c_{1,3}}{2 T}, \quad -\frac{c_{1,10}}{T}, \quad 0, \quad -\frac{c_{1,3}}{2 T}, \quad \frac{c_{1,10}}{T}, \quad 0 \end{array} \right\}
\end{aligned}$$

*In[*<sup>10</sup>*]:=*  $\{\mathbf{R}_{1,2}, \bar{\mathbf{R}}_{1,2}, \mathbf{CC}_1, \bar{\mathbf{CC}}_1\}$

*Out[*<sup>10</sup>*]:=*  $\left\{ \mathbb{E}_{\{\} \rightarrow \{1,2\}} \left[ 1, (-1 + T) x_2 (y_1 - y_2), \inSeries \left[ 0, c_{1,1} + x_1 y_1 c_{1,2} + x_2 y_2 (-T c_{1,2} - c_{1,3}) + x_2 y_1 c_{1,3} + x_1 x_2 y_1^2 c_{1,7} - \frac{1}{2} (1 - T) x_2^2 y_1^2 c_{1,10} + x_1 x_2 y_1 y_2 c_{1,10} + x_2^2 y_1 y_2 \left( -T c_{1,7} - \frac{1}{2} (-1 + 3 T) c_{1,10} \right) \right] \right], \mathbb{E}_{\{\} \rightarrow \{1,2\}} \left[ 1, \left( -1 + \frac{1}{T} \right) x_2 (y_1 - y_2), \inSeries \left[ 0, -c_{1,1} - x_1 y_1 c_{1,2} - \frac{x_2 y_1 c_{1,3}}{T^2} + x_2 y_2 \left( \frac{c_{1,2}}{T} + \frac{c_{1,3}}{T^2} \right) - \frac{(1 - T) x_2^2 y_1^2 c_{1,10}}{2 T^3} - \frac{x_1 x_2 y_1 y_2 c_{1,10}}{T^2} + x_2^2 y_1 y_2 \left( \frac{c_{1,7}}{T^2} - \frac{(-1 - T) c_{1,10}}{2 T^3} \right) + x_1 x_2 y_1^2 \left( -\frac{c_{1,7}}{T} - \frac{(-1 + T) c_{1,10}}{T^2} \right) \right] \right], \mathbb{E}_{\{\} \rightarrow \{1\}} \left[ \sqrt{T}, 0, \inSeries \left[ 0, \frac{c_{1,3}}{2 T} - \frac{x_1 y_1 c_{1,10}}{T} \right] \right], \mathbb{E}_{\{\} \rightarrow \{1\}} \left[ \frac{1}{\sqrt{T}}, 0, \inSeries \left[ 0, -\frac{c_{1,3}}{2 T} + \frac{x_1 y_1 c_{1,10}}{T} \right] \right] \right\}$

*In[*<sup>11</sup>*]:=*  $\mathbf{c}_{1,1} = \mathbf{c}_{1,2} = \mathbf{c}_{1,3} = \mathbf{c}_{1,7} = 0; \mathbf{c}_{1,10} = 1;$   
 $\{\mathbf{R}_{1,2}, \bar{\mathbf{R}}_{1,2}, \mathbf{CC}_1, \bar{\mathbf{CC}}_1\}$

*Out[*<sup>11</sup>*]:=*  $\left\{ \mathbb{E}_{\{\} \rightarrow \{1,2\}} \left[ 1, (-1 + T) x_2 (y_1 - y_2), \inSeries \left[ 0, \frac{1}{2} (-1 + T) x_2^2 y_1^2 + x_1 x_2 y_1 y_2 + \frac{1}{2} (1 - 3 T) x_2^2 y_1 y_2 \right] \right], \mathbb{E}_{\{\} \rightarrow \{1,2\}} \left[ 1, \left( -1 + \frac{1}{T} \right) x_2 (y_1 - y_2), \inSeries \left[ 0, -\frac{(-1 + T) x_1 x_2 y_1^2}{T^2} - \frac{(1 - T) x_2^2 y_1^2}{2 T^3} - \frac{x_1 x_2 y_1 y_2}{T^2} - \frac{(-1 - T) x_2^2 y_1 y_2}{2 T^3} \right] \right], \mathbb{E}_{\{\} \rightarrow \{1\}} \left[ \sqrt{T}, 0, \inSeries \left[ 0, -\frac{x_1 y_1}{T} \right] \right], \mathbb{E}_{\{\} \rightarrow \{1\}} \left[ \frac{1}{\sqrt{T}}, 0, \inSeries \left[ 0, \frac{x_1 y_1}{T} \right] \right] \right\}$

*In[*<sup>12</sup>*]:=*  $\{(\mathbf{R}_{1,2} \mathbf{R}_{4,3} \mathbf{R}_{5,6} // \mathbf{m}_{1,4 \rightarrow 1} // \mathbf{m}_{2,5 \rightarrow 2} // \mathbf{m}_{3,6 \rightarrow 3}) \equiv (\mathbf{R}_{2,3} \mathbf{R}_{4,5} \mathbf{R}_{1,6} // \mathbf{m}_{1,4 \rightarrow 1} // \mathbf{m}_{2,5 \rightarrow 2} // \mathbf{m}_{3,6 \rightarrow 3}), (\mathbf{R}_{1,2} \bar{\mathbf{R}}_{3,4} // \mathbf{m}_{1,3 \rightarrow 1} // \mathbf{m}_{2,4 \rightarrow 2}) \equiv \mathbb{E}_{\{\} \rightarrow \{1,2\}} [1, 0, \inSeries [0]], (\mathbf{CC}_1 \bar{\mathbf{CC}}_2 // \mathbf{m}_{1,2 \rightarrow 1}) \equiv \mathbb{E}_{\{\} \rightarrow \{1\}} [1, 0, \inSeries [0]], (\mathbf{CC}_3 \mathbf{R}_{1,2} // \mathbf{m}_{2,3 \rightarrow 2} // \mathbf{m}_{2,1 \rightarrow 1}) \equiv (\bar{\mathbf{CC}}_3 \mathbf{R}_{1,2} // \mathbf{m}_{1,3 \rightarrow 1} // \mathbf{m}_{1,2 \rightarrow 1})\}$

*Out[*<sup>12</sup>*]:=* {True, True, True, True}

## Solving for R, CC, \$k = 2

```
In[=]:= $k = 2;
Short[#, 10] &[
{ (R1,2 R4,3 R5,6 // m1,4→1 // m2,5→2 // m3,6→3) ≡ (R2,3 R4,5 R1,6 // m1,4→1 // m2,5→2 // m3,6→3), 
(R1,2 R̄3,4 // m1,3→1 // m2,4→2) ≡ E{ }→{1,2} [1, 0, eSeries[0]], 
(CC1 CC̄2 // m1,2→1) ≡ E{ }→{1} [1, 0, eSeries[0]], 
(CC3 R1,2 // m2,3→2 // m2,1→1) ≡ (CC̄3 R1,2 // m1,3→1 // m1,2→1) }]
Out[=]/Short= { (-1 + T) x1 x2 x3 y12 y3 - 3 T x1 x2 x3 y1 y2 y3 + (-2 T + 4 T2) x1 x32 y1 y2 y3 + <<112>> + 
x33 y23 (T3 c2,18 + T3 c2,27 - 3 T4 c2,27 + 3 T5 c2,27 - T6 c2,27 + T2 c2,28 - 3 T3 c2,28 + 3 T4 c2,28 - 
T5 c2,28 + T c2,29 - 3 T2 c2,29 + 3 T3 c2,29 - T4 c2,29 + c2,30 - 3 T c2,30 + 3 T2 c2,30 - T3 c2,30) + 
x33 y12 y3 (T2 - 4 T3 + 3 T4 + T c2,22 - 2 T2 c2,22 + 2 T3 c2,22 + 2 T c2,26 - 4 T2 c2,26 + 
2 T3 c2,26 + 3 T c2,30 - 6 T2 c2,30 + 3 T3 c2,30) == 
3 c2,1 + 2 x1 y1 c2,2 + <<143>> + x33 y22 y3 (T3 c2,22 + 3 T c2,30 - 6 T2 c2,30 + 3 T3 c2,30), 
<<2>>, <<1>> + <<1>> + <<1>> + <<1>> } 
2 T3 + <<1>> + <<1>> + <<1>> == <<1>> }

In[=]:= unknowns = Cases[{R1,2, R̄1,2, CC1, CC̄1}, (c | d | e | f)$k,-, ∞] // Union
Out[=]= {c2,1, c2,2, c2,3, c2,4, c2,5, c2,6, c2,7, c2,8, c2,9, c2,10, c2,11, c2,12, c2,13, c2,14, 
c2,15, c2,16, c2,17, c2,18, c2,19, c2,20, c2,21, c2,22, c2,23, c2,24, c2,25, c2,26, c2,27, 
c2,28, c2,29, c2,30, d2,1, d2,2, d2,3, d2,4, d2,5, d2,6, d2,7, d2,8, d2,9, d2,10, d2,11, 
d2,12, d2,13, d2,14, d2,15, d2,16, d2,17, d2,18, d2,19, d2,20, d2,21, d2,22, d2,23, d2,24, 
d2,25, d2,26, d2,27, d2,28, d2,29, d2,30, e2,1, e2,2, e2,3, e2,4, f2,1, f2,2, f2,3, f2,4}

In[=]:= Short[errors = CF@{ (R1,2 R4,3 R5,6 // m1,4→1 // m2,5→2 // m3,6→3) [[3, -1]] - 
(R2,3 R4,5 R1,6 // m1,4→1 // m2,5→2 // m3,6→3) [[3, -1]], 
(R1,2 R̄3,4 // m1,3→1 // m2,4→2) [[3, -1]], 
(CC1 CC̄2 // m1,2→1) [[3, -1]], 
(CC3 R1,2 // m2,3→2 // m2,1→1) [[3, -1]] - (CC̄3 R1,2 // m1,3→1 // m1,2→1) [[3, -1]]}, 
10]
Out[=]/Short= <<1>>

In[=]:= Short[#, 10] &[eqns =
Thread[θ == Union @@ (CoefficientRules[#, {x1, x2, x3, y1, y2, y3}][[;; , 2]] & /@ errors)]]
Out[=]/Short= {θ == c2,4 - T c2,4, θ == -c2,4 + T c2,4, θ == T c2,4 - T2 c2,4, <<168>>, θ == e2,4 + f2,4, θ == 
1/2 - 1/(2 T3) + 1/(2 T2) - T/2 + c2,15 - T3 c2,15 + c2,16/T - T2 c2,16 + c2,17/T2 - T c2,17 - c2,18 + c2,18/T3 + c2,19 - T3 c2,19 + 
c2,20/T - T2 c2,20 + c2,21/T2 - T c2,21 - c2,22 + c2,22/T3 + c2,23 - T3 c2,23 + c2,24/T - T2 c2,24 + c2,25/T2 - T c2,25 - 
c2,26 + c2,26/T3 + c2,27 - T3 c2,27 + c2,28/T - T2 c2,28 + c2,29/T2 - T c2,29 - c2,30 + c2,30/T3 + e2,4/T3 - T3 f2,4}
```

*In[1]:= {sol} = Solve[eqns, unknowns]*

**Solve:** Equations may not give solutions for all "solve" variables.

$$\begin{aligned}
 \text{Out[1]:= } & \left\{ \begin{array}{l} c_{2,4} \rightarrow 0, c_{2,5} \rightarrow -T c_{2,2} - c_{2,3}, c_{2,6} \rightarrow 0, c_{2,8} \rightarrow -\frac{1}{2} (1-T) c_{2,10}, c_{2,9} \rightarrow 0, \\ c_{2,11} \rightarrow -\frac{1}{2} - T c_{2,7} - \frac{1}{2} (-1 + 3T) c_{2,10}, c_{2,12} \rightarrow 0, c_{2,13} \rightarrow 0, c_{2,14} \rightarrow 0, c_{2,15} \rightarrow 0, \\ c_{2,17} \rightarrow -(-1 + T) c_{2,16}, c_{2,18} \rightarrow -\frac{-1 + 4T - 3T^2}{6T}, c_{2,19} \rightarrow 0, c_{2,20} \rightarrow -\frac{1}{2T}, \\ c_{2,21} \rightarrow -\frac{1 - 3T}{2T}, c_{2,22} \rightarrow -\frac{1 - 11T + 16T^2}{6T} - (T - T^2) c_{2,16}, c_{2,23} \rightarrow 0, c_{2,24} \rightarrow 0, \\ c_{2,25} \rightarrow -\frac{1}{2}, c_{2,26} \rightarrow \frac{1}{6} (-1 + 7T) - T^2 c_{2,16}, c_{2,27} \rightarrow 0, c_{2,28} \rightarrow 0, c_{2,29} \rightarrow 0, c_{2,30} \rightarrow 0, \\ d_{2,1} \rightarrow -c_{2,1}, d_{2,2} \rightarrow -c_{2,2}, d_{2,3} \rightarrow -\frac{c_{2,3}}{T^2}, d_{2,4} \rightarrow 0, d_{2,5} \rightarrow \frac{c_{2,2}}{T} + \frac{c_{2,3}}{T^2}, d_{2,6} \rightarrow 0, \\ d_{2,7} \rightarrow -\frac{1-T}{T^3} - \frac{c_{2,7}}{T} - \frac{(-1+T)c_{2,10}}{T^2}, d_{2,8} \rightarrow -\frac{-1+T}{2T^4} - \frac{(1-T)c_{2,10}}{2T^3}, d_{2,9} \rightarrow 0, \\ d_{2,10} \rightarrow \frac{1}{T^3} - \frac{c_{2,10}}{T^2}, d_{2,11} \rightarrow -\frac{1}{2T^4} + \frac{c_{2,7}}{T^2} - \frac{(-1-T)c_{2,10}}{2T^3}, d_{2,12} \rightarrow 0, d_{2,13} \rightarrow 0, d_{2,14} \rightarrow 0, \\ d_{2,15} \rightarrow 0, d_{2,16} \rightarrow -\frac{-1+T}{2T^3} - \frac{c_{2,16}}{T}, d_{2,17} \rightarrow -\frac{3-4T+T^2}{2T^4} - \frac{(-1+T)c_{2,16}}{T^2}, d_{2,18} \rightarrow -\frac{-3+4T-T^2}{6T^5}, \\ d_{2,19} \rightarrow 0, d_{2,20} \rightarrow -\frac{1}{2T^3}, d_{2,21} \rightarrow \frac{2}{T^4}, d_{2,22} \rightarrow -\frac{4+T+T^2}{6T^5} - \frac{(1-T)c_{2,16}}{T^3}, d_{2,23} \rightarrow 0, d_{2,24} \rightarrow 0, \\ d_{2,25} \rightarrow -\frac{1}{2T^4}, d_{2,26} \rightarrow -\frac{-1+T}{6T^5} + \frac{c_{2,16}}{T^3}, d_{2,27} \rightarrow 0, d_{2,28} \rightarrow 0, d_{2,29} \rightarrow 0, d_{2,30} \rightarrow 0, e_{2,1} \rightarrow \frac{c_{2,3}}{2T}, \\ e_{2,2} \rightarrow -\frac{c_{2,10}}{T}, e_{2,3} \rightarrow 0, e_{2,4} \rightarrow 0, f_{2,1} \rightarrow -\frac{c_{2,3}}{2T}, f_{2,2} \rightarrow -\frac{1}{T^2} + \frac{c_{2,10}}{T}, f_{2,3} \rightarrow 0, f_{2,4} \rightarrow 0 \end{array} \right\} \end{aligned}$$

In[1]:= **sol** /. (**a**\_ → **b**\_) ↪ (**a** = **b**)

$$\text{Out}[1]= \left\{ 0, -T c_{2,2} - c_{2,3}, 0, -\frac{1}{2} (1-T) c_{2,10}, 0, -\frac{1}{2} - T c_{2,7} - \frac{1}{2} (-1+3T) c_{2,10}, 0, 0, 0, 0, 0, \right.$$

$$-\left( (-1+T) c_{2,16} \right), -\frac{-1+4T-3T^2}{6T}, 0, -\frac{1}{2T}, -\frac{1-3T}{2T}, -\frac{1-11T+16T^2}{6T} - (T-T^2) c_{2,16},$$

$$0, 0, -\frac{1}{2}, \frac{1}{6} (-1+7T) - T^2 c_{2,16}, 0, 0, 0, 0, -c_{2,1}, -c_{2,2}, -\frac{c_{2,3}}{T^2}, 0, \frac{c_{2,2}}{T} + \frac{c_{2,3}}{T^2},$$

$$0, -\frac{1-T}{T^3} - \frac{c_{2,7}}{T} - \frac{(-1+T) c_{2,10}}{T^2}, -\frac{-1+T}{2T^4} - \frac{(1-T) c_{2,10}}{2T^3}, 0, \frac{1}{T^3} - \frac{c_{2,10}}{T^2},$$

$$-\frac{1}{2T^4} + \frac{c_{2,7}}{T^2} - \frac{(-1-T) c_{2,10}}{2T^3}, 0, 0, 0, 0, -\frac{-1+T}{2T^3} - \frac{c_{2,16}}{T}, -\frac{3-4T+T^2}{2T^4} - \frac{(-1+T) c_{2,16}}{T^2},$$

$$-\frac{-3+4T-T^2}{6T^5}, 0, -\frac{1}{2T^3}, \frac{2}{T^4}, -\frac{4+T+T^2}{6T^5} - \frac{(1-T) c_{2,16}}{T^3}, 0, 0, -\frac{1}{2T^4},$$

$$\left. -\frac{-1+T}{6T^5} + \frac{c_{2,16}}{T^3}, 0, 0, 0, 0, \frac{c_{2,3}}{2T}, -\frac{c_{2,10}}{T}, 0, 0, -\frac{c_{2,3}}{2T}, -\frac{1}{T^2} + \frac{c_{2,10}}{T}, 0, 0 \right\}$$

In[2]:= **c**<sub>2,1</sub> = **c**<sub>2,2</sub> = **c**<sub>2,3</sub> = **c**<sub>2,7</sub> = **c**<sub>2,10</sub> = **c**<sub>2,16</sub> = 0;

$$\{\mathbf{R}_{1,2}, \overline{\mathbf{R}}_{1,2}, \mathbf{CC}_1, \overline{\mathbf{CC}}_1\}$$

$$\text{Out}[2]= \left\{ \mathbb{E}_{\{ \} \rightarrow \{ 1,2 \}} \left[ 1, (-1+T) x_2 (y_1 - y_2), \in \text{Series} \left[ 0, \frac{1}{2} (-1+T) x_2^2 y_1^2 + x_1 x_2 y_1 y_2 + \frac{1}{2} (1-3T) x_2^2 y_1 y_2, \right. \right. \right. \right.$$

$$-\frac{(-1+4T-3T^2) x_2^3 y_1^3}{6T} - \frac{1}{2} x_2^2 y_1 y_2 - \frac{x_1^2 x_2 y_1^2 y_2}{2T} - \frac{(1-3T) x_1 x_2^2 y_1^2 y_2}{2T} - \frac{(1-11T+16T^2) x_2^3 y_1^2 y_2}{6T} -$$

$$\left. \left. \left. \left. \frac{1}{2} x_1 x_2^2 y_1 y_2^2 + \frac{1}{6} (-1+7T) x_2^3 y_1 y_2^2 \right] \right], \mathbb{E}_{\{ \} \rightarrow \{ 1,2 \}} \left[ 1, \left( -1 + \frac{1}{T} \right) x_2 (y_1 - y_2), \right. \right. \right. \right.$$

$$\left. \left. \left. \left. \in \text{Series} \left[ 0, -\frac{(-1+T) x_1 x_2 y_1^2}{T^2} - \frac{(1-T) x_2^2 y_1^2}{2T^3} - \frac{x_1 x_2 y_1 y_2}{T^2} - \frac{(-1-T) x_2^2 y_1 y_2}{2T^3}, -\frac{(1-T) x_1 x_2 y_1^2}{T^3} - \right. \right. \right. \right.$$

$$\left. \left. \left. \left. \frac{(-1+T) x_2^2 y_1^2}{2T^4} - \frac{(-1+T) x_1^2 x_2 y_1^3}{2T^3} - \frac{(3-4T+T^2) x_1 x_2^2 y_1^3}{2T^4} - \frac{(-3+4T-T^2) x_2^3 y_1^3}{6T^5} + \frac{x_1 x_2 y_1 y_2}{T^3} - \right. \right. \right. \right.$$

$$\left. \left. \left. \left. \frac{x_2^2 y_1 y_2}{2T^4} - \frac{x_1^2 x_2 y_1^2 y_2}{2T^3} + \frac{2 x_1 x_2^2 y_1^2 y_2}{T^4} - \frac{(4+T+T^2) x_2^3 y_1^2 y_2}{6T^5} - \frac{x_1 x_2^2 y_1 y_2^2}{2T^4} - \frac{(-1+T) x_2^3 y_1 y_2^2}{6T^5} \right] \right], \right. \right. \right. \right.$$

$$\left. \left. \left. \left. \mathbb{E}_{\{ \} \rightarrow \{ 1 \}} \left[ \sqrt{T}, 0, \in \text{Series} \left[ 0, -\frac{x_1 y_1}{T}, 0 \right] \right], \mathbb{E}_{\{ \} \rightarrow \{ 1 \}} \left[ \frac{1}{\sqrt{T}}, 0, \in \text{Series} \left[ 0, \frac{x_1 y_1}{T}, -\frac{x_1 y_1}{T^2} \right] \right] \right] \right\}$$

$$\begin{aligned} \text{In}[3]= & \{ (\mathbf{R}_{1,2} \mathbf{R}_{4,3} \mathbf{R}_{5,6} // \mathbf{m}_{1,4 \rightarrow 1} // \mathbf{m}_{2,5 \rightarrow 2} // \mathbf{m}_{3,6 \rightarrow 3}) \equiv (\mathbf{R}_{2,3} \mathbf{R}_{4,5} \mathbf{R}_{1,6} // \mathbf{m}_{1,4 \rightarrow 1} // \mathbf{m}_{2,5 \rightarrow 2} // \mathbf{m}_{3,6 \rightarrow 3}), \\ & (\mathbf{R}_{1,2} \overline{\mathbf{R}}_{3,4} // \mathbf{m}_{1,3 \rightarrow 1} // \mathbf{m}_{2,4 \rightarrow 2}) \equiv \mathbb{E}_{\{ \} \rightarrow \{ 1,2 \}} [1, 0, \in \text{Series} [\mathbf{0}]], \\ & (\mathbf{CC}_1 \overline{\mathbf{CC}}_2 // \mathbf{m}_{1,2 \rightarrow 1}) \equiv \mathbb{E}_{\{ \} \rightarrow \{ 1 \}} [1, 0, \in \text{Series} [\mathbf{0}]], \\ & (\mathbf{CC}_3 \mathbf{R}_{1,2} // \mathbf{m}_{2,3 \rightarrow 2} // \mathbf{m}_{2,1 \rightarrow 1}) \equiv (\overline{\mathbf{CC}}_3 \mathbf{R}_{1,2} // \mathbf{m}_{1,3 \rightarrow 1} // \mathbf{m}_{1,2 \rightarrow 1}) \} \end{aligned}$$

$$\text{Out}[3]= \{ \text{True}, \text{True}, \text{True}, \text{True} \}$$

## Solving for R, CC, \$k = 3

```
In[]:= $k = 3;
Short[#, 10] & [
{ (R1,2 R4,3 R5,6 // m1,4→1 // m2,5→2 // m3,6→3) ≡ (R2,3 R4,5 R1,6 // m1,4→1 // m2,5→2 // m3,6→3), 
(R1,2 R̄3,4 // m1,3→1 // m2,4→2) ≡ E{ }→{1,2} [1, 0, eSeries[0]], 
(CC1 C̄C2 // m1,2→1) ≡ E{ }→{1} [1, 0, eSeries[0]], 
(CC3 R1,2 // m2,3→2 // m2,1→1) ≡ (C̄C3 R1,2 // m1,3→1 // m1,2→1) }]
Out[//Short]= { (1 - T) x12 x2 x3 y13 y3 / 2 T + (1 - 4 T + 3 T2) x1 x22 x3 y13 y3 / 2 T + <<267>> + x34 <<1>> (T4 c<<1>> + <<35>>) +
1/24 x34 y12 y32 (7 T2 - 97 T3 + 329 T4 - 239 T5 + 24 T2 c3,45 - 48 T3 c3,45 + 48 T4 c3,45 +
72 T2 c3,50 - 144 T3 c3,50 + 72 T4 c3,50 + 144 T2 c3,55 - 288 T3 c3,55 + 144 T4 c3,55) +
1/12 T x34 y14 (5 - 19 T + 13 T2 + 38 T3 - 89 T4 + 77 T5 - 25 T6 + 12 T5 c3,31 - 48 T6 c3,31 +
<<46>> + 12 T c3,50 - 48 T2 c3,50 + 72 T3 c3,50 - 48 T4 c3,50 + 12 T5 c3,50 +
12 T c3,55 - 48 T2 c3,55 + 72 T3 c3,55 - 48 T4 c3,55 + 12 T5 c3,55) ==
3 c3,1 + 2 x1 y1 c3,2 + <<367>> + <<1>> + x34 <<3>>, <<3>> }

In[]:= unknowns = Cases[{R1,2, R̄1,2, CC1, C̄C1}, (c | d | e | f)$k,-∞] // Union
Out[]= {c3,1, c3,2, c3,3, c3,4, c3,5, c3,6, c3,7, c3,8, c3,9, c3,10, c3,11, c3,12, c3,13, c3,14, c3,15, c3,16, c3,17, c3,18, c3,19, c3,20, c3,21, c3,22, c3,23, c3,24, c3,25, c3,26, c3,27, c3,28, c3,29, c3,30, c3,31, c3,32, c3,33, c3,34, c3,35, c3,36, c3,37, c3,38, c3,39, c3,40, c3,41, c3,42, c3,43, c3,44, c3,45, c3,46, c3,47, c3,48, c3,49, c3,50, c3,51, c3,52, c3,53, c3,54, c3,55, d3,1, d3,2, d3,3, d3,4, d3,5, d3,6, d3,7, d3,8, d3,9, d3,10, d3,11, d3,12, d3,13, d3,14, d3,15, d3,16, d3,17, d3,18, d3,19, d3,20, d3,21, d3,22, d3,23, d3,24, d3,25, d3,26, d3,27, d3,28, d3,29, d3,30, d3,31, d3,32, d3,33, d3,34, d3,35, d3,36, d3,37, d3,38, d3,39, d3,40, d3,41, d3,42, d3,43, d3,44, d3,45, d3,46, d3,47, d3,48, d3,49, d3,50, d3,51, d3,52, d3,53, d3,54, d3,55, e3,1, e3,2, e3,3, e3,4, e3,5, f3,1, f3,2, f3,3, f3,4, f3,5}

In[]:= Short[errors = CF@{ (R1,2 R4,3 R5,6 // m1,4→1 // m2,5→2 // m3,6→3) [[3, -1]] -
(R2,3 R4,5 R1,6 // m1,4→1 // m2,5→2 // m3,6→3) [[3, -1]], 
(R1,2 R̄3,4 // m1,3→1 // m2,4→2) [[3, -1]], 
(CC1 C̄C2 // m1,2→1) [[3, -1]], 
(CC3 R1,2 // m2,3→2 // m2,1→1) [[3, -1]] - (C̄C3 R1,2 // m1,3→1 // m1,2→1) [[3, -1]]}, 
10]
Out[//Short]= { <<1>> }
```

In[1]:= **Short**[#, 10] &[**eqns** =  
**Thread**[θ == **Union** @@ (**CoefficientRules**[#, {x<sub>1</sub>, x<sub>2</sub>, x<sub>3</sub>, y<sub>1</sub>, y<sub>2</sub>, y<sub>3</sub>}][;; , 2] & /@ **errors**)]]

Out[1]/.Short=  $\left\{ \theta == c_{3,4} - T c_{3,4}, \text{ } \right.$   
 $\theta == \frac{3}{4} + \frac{5}{12 T^5} - \frac{3}{4 T^4} - \frac{1}{6 T^3} - \frac{5}{12 T} + \frac{T}{6} + c_{3,31} - T^4 c_{3,31} + \frac{c_{3,32}}{T} - T^3 c_{3,32} + \frac{c_{3,33}}{T^2} - T^2 c_{3,33} + \frac{c_{3,34}}{T^3} -$   
 $T c_{3,34} - c_{3,35} + \frac{c_{3,35}}{T^4} + c_{3,36} - T^4 c_{3,36} + \frac{c_{3,37}}{T} - T^3 c_{3,37} + \frac{c_{3,38}}{T^2} - T^2 c_{3,38} + \frac{c_{3,39}}{T^3} - T c_{3,39} -$   
 $c_{3,40} + \frac{c_{3,40}}{T^4} + c_{3,41} - T^4 c_{3,41} + \frac{c_{3,42}}{T} - T^3 c_{3,42} + \frac{c_{3,43}}{T^2} - T^2 c_{3,43} + \frac{c_{3,44}}{T^3} - T c_{3,44} - c_{3,45} + \frac{c_{3,45}}{T^4} +$   
 $c_{3,46} - T^4 c_{3,46} + \frac{c_{3,47}}{T} - T^3 c_{3,47} + \frac{c_{3,48}}{T^2} - T^2 c_{3,48} + \frac{c_{3,49}}{T^3} - T c_{3,49} - c_{3,50} + \frac{c_{3,50}}{T^4} + c_{3,51} -$   
 $T^4 c_{3,51} + \frac{c_{3,52}}{T} - T^3 c_{3,52} + \frac{c_{3,53}}{T^2} - T^2 c_{3,53} + \frac{c_{3,54}}{T^3} - T c_{3,54} - c_{3,55} + \frac{c_{3,55}}{T^4} + \frac{e_{3,5}}{T^4} - T^4 f_{3,5} \left\} \right.$

In[2]:= {sol} = **Solve**[eqns, unknowns]

**Solve**: Equations may not give solutions for all "solve" variables.

Out[2]=  $\left\{ \begin{array}{l} c_{3,4} \rightarrow \theta, c_{3,5} \rightarrow -T c_{3,2} - c_{3,3}, c_{3,6} \rightarrow \theta, c_{3,8} \rightarrow -\frac{1}{2} (1 - T) c_{3,10}, c_{3,9} \rightarrow \theta, \\ c_{3,11} \rightarrow -T c_{3,7} - \frac{1}{2} (-1 + 3 T) c_{3,10}, c_{3,12} \rightarrow \theta, c_{3,13} \rightarrow \theta, c_{3,14} \rightarrow \theta, c_{3,15} \rightarrow \theta, \\ c_{3,17} \rightarrow -(-1 + T) c_{3,16}, c_{3,18} \rightarrow -\frac{1 - T}{6 T}, c_{3,19} \rightarrow \theta, c_{3,20} \rightarrow \theta, c_{3,21} \rightarrow \frac{1}{2 T}, \\ c_{3,22} \rightarrow -\frac{-2 + 5 T}{2 T} - (T - T^2) c_{3,16}, c_{3,23} \rightarrow \theta, c_{3,24} \rightarrow \theta, c_{3,25} \rightarrow \theta, c_{3,26} \rightarrow -\frac{5}{6} - T^2 c_{3,16}, c_{3,27} \rightarrow \theta, \\ c_{3,28} \rightarrow \theta, c_{3,29} \rightarrow \theta, c_{3,30} \rightarrow \theta, c_{3,31} \rightarrow \theta, c_{3,33} \rightarrow -\frac{3}{2} (-1 + T) c_{3,32}, c_{3,34} \rightarrow -(-1 + 2 T - T^2) c_{3,32}, \\ c_{3,35} \rightarrow -\frac{1 - 12 T + 27 T^2 - 16 T^3}{24 T^2}, c_{3,36} \rightarrow \theta, c_{3,37} \rightarrow \frac{1}{6 T^2}, c_{3,38} \rightarrow -\frac{-1 + 3 T}{4 T^2}, \\ c_{3,39} \rightarrow -\frac{-1 + 11 T - 16 T^2}{6 T^2}, c_{3,40} \rightarrow -\frac{-1 + 31 T - 131 T^2 + 125 T^3}{24 T^2} - (T - 2 T^2 + T^3) c_{3,32}, c_{3,41} \rightarrow \theta, \\ c_{3,42} \rightarrow \theta, c_{3,43} \rightarrow \frac{1}{T}, c_{3,44} \rightarrow -\frac{-5 + 23 T}{6 T}, c_{3,45} \rightarrow -\frac{-5 + 69 T - 142 T^2}{24 T} + \frac{3}{2} (-1 + T) T^2 c_{3,32}, c_{3,46} \rightarrow \theta, \\ c_{3,47} \rightarrow \theta, c_{3,48} \rightarrow \theta, c_{3,49} \rightarrow \frac{1}{6}, c_{3,50} \rightarrow \frac{1}{24} (1 - 15 T) - T^3 c_{3,32}, c_{3,51} \rightarrow \theta, c_{3,52} \rightarrow \theta, c_{3,53} \rightarrow \theta, \\ c_{3,54} \rightarrow \theta, c_{3,55} \rightarrow \theta, d_{3,1} \rightarrow -c_{3,1}, d_{3,2} \rightarrow -c_{3,2}, d_{3,3} \rightarrow -\frac{c_{3,3}}{T^2}, d_{3,4} \rightarrow \theta, d_{3,5} \rightarrow \frac{c_{3,2}}{T} + \frac{c_{3,3}}{T^2}, \\ d_{3,6} \rightarrow \theta, d_{3,7} \rightarrow -\frac{-1 + T}{T^4} - \frac{c_{3,7}}{T} - \frac{(-1 + T) c_{3,10}}{T^2}, d_{3,8} \rightarrow -\frac{1 - T}{2 T^5} - \frac{(1 - T) c_{3,10}}{2 T^3}, d_{3,9} \rightarrow \theta, \\ d_{3,10} \rightarrow -\frac{1}{T^4} - \frac{c_{3,10}}{T^2}, d_{3,11} \rightarrow \frac{1}{2 T^5} + \frac{c_{3,7}}{T^2} - \frac{(-1 - T) c_{3,10}}{2 T^3}, d_{3,12} \rightarrow \theta, d_{3,13} \rightarrow \theta, d_{3,14} \rightarrow \theta, d_{3,15} \rightarrow \theta, \\ d_{3,16} \rightarrow -\frac{1 - T}{T^4} - \frac{c_{3,16}}{T}, d_{3,17} \rightarrow -\frac{-7 + 9 T - 2 T^2}{2 T^5} - \frac{(-1 + T) c_{3,16}}{T^2}, d_{3,18} \rightarrow -\frac{7 - 9 T + 2 T^2}{6 T^6}, d_{3,19} \rightarrow \theta, \end{array} \right.$

$$\begin{aligned}
d_{3,20} &\rightarrow \frac{1}{T^4}, d_{3,21} \rightarrow -\frac{9-T}{2T^5}, d_{3,22} \rightarrow \frac{3}{2T^6} - \frac{(1-T)c_{3,16}}{T^3}, d_{3,23} \rightarrow 0, d_{3,24} \rightarrow 0, d_{3,25} \rightarrow \frac{1}{T^5}, \\
d_{3,26} &\rightarrow -\frac{1}{3T^6} + \frac{c_{3,16}}{T^3}, d_{3,27} \rightarrow 0, d_{3,28} \rightarrow 0, d_{3,29} \rightarrow 0, d_{3,30} \rightarrow 0, d_{3,31} \rightarrow 0, d_{3,32} \rightarrow -\frac{-1+T}{6T^4} - \frac{c_{3,32}}{T}, \\
d_{3,33} &\rightarrow -\frac{2-3T+T^2}{T^5} - \frac{3(-1+T)c_{3,32}}{2T^2}, d_{3,34} \rightarrow -\frac{-16+27T-12T^2+T^3}{6T^6} - \frac{(1-2T+T^2)c_{3,32}}{T^3}, \\
d_{3,35} &\rightarrow -\frac{16-27T+12T^2-T^3}{24T^7}, d_{3,36} \rightarrow 0, d_{3,37} \rightarrow -\frac{1}{6T^4}, d_{3,38} \rightarrow -\frac{-3+T}{T^5}, \\
d_{3,39} &\rightarrow \frac{3(-3+T)}{2T^6}, d_{3,40} \rightarrow -\frac{-27+5T-T^2-T^3}{24T^7} - \frac{(-1+2T-T^2)c_{3,32}}{T^4}, d_{3,41} \rightarrow 0, \\
d_{3,42} &\rightarrow 0, d_{3,43} \rightarrow -\frac{1}{T^5}, d_{3,44} \rightarrow \frac{2}{T^6}, d_{3,45} \rightarrow -\frac{12-T-5T^2}{24T^7} + \frac{3(-1+T)c_{3,32}}{2T^4}, \\
d_{3,46} &\rightarrow 0, d_{3,47} \rightarrow 0, d_{3,48} \rightarrow 0, d_{3,49} \rightarrow -\frac{1}{6T^6}, d_{3,50} \rightarrow -\frac{-1-T}{24T^7} + \frac{c_{3,32}}{T^4}, d_{3,51} \rightarrow 0, \\
d_{3,52} &\rightarrow 0, d_{3,53} \rightarrow 0, d_{3,54} \rightarrow 0, d_{3,55} \rightarrow 0, e_{3,1} \rightarrow \frac{c_{3,3}}{2T}, e_{3,2} \rightarrow -\frac{c_{3,10}}{T}, e_{3,3} \rightarrow 0, \\
e_{3,4} &\rightarrow 0, e_{3,5} \rightarrow 0, f_{3,1} \rightarrow -\frac{c_{3,3}}{2T}, f_{3,2} \rightarrow \frac{1}{T^3} + \frac{c_{3,10}}{T}, f_{3,3} \rightarrow 0, f_{3,4} \rightarrow 0, f_{3,5} \rightarrow 0 \} \}
\end{aligned}$$

In[1]:= **sol** /. (*a*\_ → *b*\_) ↦ (*a* = *b*)

$$\begin{aligned}
Out[1]= & \left\{ 0, -T c_{3,2} - c_{3,3}, 0, -\frac{1}{2} (1-T) c_{3,10}, 0, -T c_{3,7} - \frac{1}{2} (-1+3T) c_{3,10}, 0, 0, 0, 0, \right. \\
& - ((-1+T) c_{3,16}), -\frac{1-T}{6T}, 0, 0, \frac{1}{2T}, -\frac{-2+5T}{2T} - (T-T^2) c_{3,16}, 0, 0, 0, \frac{5}{6} - T^2 c_{3,16}, 0, \\
& 0, 0, 0, 0, -\frac{3}{2} (-1+T) c_{3,32}, -(( -1+2T-T^2) c_{3,32}), -\frac{1-12T+27T^2-16T^3}{24T^2}, 0, \frac{1}{6T^2}, \\
& -\frac{-1+3T}{4T^2}, -\frac{-1+11T-16T^2}{6T^2}, -\frac{-1+31T-131T^2+125T^3}{24T^2} - (T-2T^2+T^3) c_{3,32}, 0, 0, \frac{1}{T}, \\
& -\frac{-5+23T}{6T}, -\frac{-5+69T-142T^2}{24T} + \frac{3}{2} (-1+T) T^2 c_{3,32}, 0, 0, 0, \frac{1}{6}, \frac{1}{24} (1-15T) - T^3 c_{3,32}, \\
& 0, 0, 0, 0, -c_{3,1}, -c_{3,2}, -\frac{c_{3,3}}{T^2}, 0, \frac{c_{3,2}}{T} + \frac{c_{3,3}}{T^2}, 0, -\frac{-1+T}{T^4} - \frac{c_{3,7}}{T} - \frac{(-1+T) c_{3,10}}{T^2}, \\
& -\frac{1-T}{2T^5} - \frac{(1-T) c_{3,10}}{2T^3}, 0, -\frac{1}{T^4} - \frac{c_{3,10}}{T^2}, \frac{1}{2T^5} + \frac{c_{3,7}}{T^2} - \frac{(-1-T) c_{3,10}}{2T^3}, 0, 0, 0, 0, -\frac{1-T}{T^4} - \frac{c_{3,16}}{T}, \\
& -\frac{-7+9T-2T^2}{2T^5} - \frac{(-1+T) c_{3,16}}{T^2}, -\frac{7-9T+2T^2}{6T^6}, 0, \frac{1}{T^4}, -\frac{9-T}{2T^5}, \frac{3}{2T^6} - \frac{(1-T) c_{3,16}}{T^3}, 0, \\
& 0, \frac{1}{T^5}, -\frac{1}{3T^6} + \frac{c_{3,16}}{T^3}, 0, 0, 0, 0, 0, -\frac{-1+T}{6T^4} - \frac{c_{3,32}}{T}, -\frac{2-3T+T^2}{T^5} - \frac{3(-1+T) c_{3,32}}{2T^2}, \\
& -\frac{-16+27T-12T^2+T^3}{6T^6} - \frac{(1-2T+T^2) c_{3,32}}{T^3}, -\frac{16-27T+12T^2-T^3}{24T^7}, 0, -\frac{1}{6T^4}, -\frac{-3+T}{T^5}, \frac{3(-3+T)}{2T^6}, \\
& -\frac{-27+5T-T^2-T^3}{24T^7} - \frac{(-1+2T-T^2) c_{3,32}}{T^4}, 0, 0, -\frac{1}{T^5}, \frac{2}{T^6}, -\frac{12-T-5T^2}{24T^7} + \frac{3(-1+T) c_{3,32}}{2T^4}, 0, \\
& 0, 0, -\frac{1}{6T^6}, -\frac{-1-T}{24T^7} + \frac{c_{3,32}}{T^4}, 0, 0, 0, 0, 0, \frac{c_{3,3}}{2T}, -\frac{c_{3,10}}{T}, 0, 0, 0, -\frac{c_{3,3}}{2T}, \frac{1}{T^3} + \frac{c_{3,10}}{T}, 0, 0, 0 \} \\
\end{aligned}$$

$$\ln[f^{\circ}] := \mathbf{C}_{3,1} = \mathbf{C}_{3,2} = \mathbf{C}_{3,3} = \mathbf{C}_{3,7} = \mathbf{C}_{3,10} = \mathbf{C}_{3,16} = \mathbf{C}_{3,32} = 0; \\ \{\mathbf{R}_{1,2}, \bar{\mathbf{R}}_{1,2}, \mathbf{CC}_1, \bar{\mathbf{CC}}_1\}$$

$$\begin{aligned} Out[f^{\circ}] = & \left\{ \mathbb{E}_{\{\cdot\} \rightarrow \{1,2\}} \left[ 1, (-1 + T) x_2 (y_1 - y_2), \right. \right. \\ & \inSeries \left[ 0, \frac{1}{2} (-1 + T) x_2^2 y_1^2 + x_1 x_2 y_1 y_2 + \frac{1}{2} (1 - 3 T) x_2^2 y_1 y_2, - \frac{(-1 + 4 T - 3 T^2) x_2^3 y_1^3}{6 T} - \frac{1}{2} x_2^2 y_1 y_2 - \right. \\ & \frac{x_1^2 x_2 y_1^2 y_2}{2 T} - \frac{(1 - 3 T) x_1 x_2^2 y_1^2 y_2}{2 T} - \frac{(1 - 11 T + 16 T^2) x_2^3 y_1^2 y_2}{6 T} - \frac{1}{2} x_1 x_2^2 y_1 y_2^2 + \frac{1}{6} (-1 + 7 T) x_2^3 y_1 y_2^2, \\ & - \frac{(1 - T) x_2^3 y_1^3}{6 T} - \frac{(1 - 12 T + 27 T^2 - 16 T^3) x_2^4 y_1^4}{24 T^2} + \frac{x_1 x_2^2 y_1^2 y_2}{2 T} - \frac{(-2 + 5 T) x_2^3 y_1^2 y_2}{2 T} + \frac{x_1^3 x_2 y_1^3 y_2}{6 T^2} - \\ & - \frac{(-1 + 3 T) x_1^2 x_2^2 y_1^3 y_2}{4 T^2} - \frac{(-1 + 11 T - 16 T^2) x_1 x_2^3 y_1^3 y_2}{6 T^2} - \frac{(-1 + 31 T - 131 T^2 + 125 T^3) x_2^4 y_1^3 y_2}{24 T^2} + \\ & \frac{5}{6} x_2^3 y_1 y_2^2 + \frac{x_2^2 x_2^2 y_1^2 y_2^2}{T} - \frac{(-5 + 23 T) x_1 x_2^3 y_1^2 y_2^2}{6 T} - \frac{(-5 + 69 T - 142 T^2) x_2^4 y_1^2 y_2^2}{24 T} + \\ & \left. \frac{1}{6} x_1 x_2^3 y_1 y_2^3 + \frac{1}{24} (1 - 15 T) x_2^4 y_1 y_2^3 \right], \mathbb{E}_{\{\cdot\} \rightarrow \{1,2\}} \left[ 1, \left( -1 + \frac{1}{T} \right) x_2 (y_1 - y_2), \right. \\ & \inSeries \left[ 0, - \frac{(-1 + T) x_1 x_2 y_1^2}{T^2} - \frac{(1 - T) x_2^2 y_1^2}{2 T^3} - \frac{x_1 x_2 y_1 y_2}{T^2} - \frac{(-1 - T) x_2^2 y_1 y_2}{2 T^3}, \right. \\ & - \frac{(1 - T) x_1 x_2 y_1^2}{T^3} - \frac{(-1 + T) x_2^2 y_1^2}{2 T^4} - \frac{(-1 + T) x_1^2 x_2 y_1^3}{2 T^3} - \frac{(3 - 4 T + T^2) x_1 x_2^2 y_1^3}{2 T^4} - \\ & - \frac{(-3 + 4 T - T^2) x_2^3 y_1^3}{6 T^5} + \frac{x_1 x_2 y_1 y_2}{T^3} - \frac{x_2^2 y_1 y_2}{2 T^4} - \frac{x_1^2 x_2 y_1^2 y_2}{2 T^3} + \frac{2 x_1 x_2^2 y_1^2 y_2}{T^4} - \frac{(4 + T + T^2) x_2^3 y_1^2 y_2}{6 T^5} - \\ & - \frac{x_1 x_2^2 y_1 y_2^2}{2 T^4} - \frac{(-1 + T) x_2^3 y_1 y_2^2}{6 T^5}, - \frac{(-1 + T) x_1 x_2 y_1^2}{T^4} - \frac{(1 - T) x_2^2 y_1^2}{2 T^5} - \frac{(1 - T) x_1^2 x_2 y_1^3}{T^4} - \\ & - \frac{(-7 + 9 T - 2 T^2) x_1 x_2^2 y_1^3}{2 T^5} - \frac{(7 - 9 T + 2 T^2) x_2^3 y_1^3}{6 T^6} - \frac{(-1 + T) x_1^3 x_2 y_1^4}{6 T^4} - \frac{(2 - 3 T + T^2) x_1^2 x_2^2 y_1^4}{T^5} - \\ & - \frac{(-16 + 27 T - 12 T^2 + T^3) x_1 x_2^3 y_1^4}{6 T^6} - \frac{(16 - 27 T + 12 T^2 - T^3) x_2^4 y_1^4}{24 T^7} - \frac{x_1 x_2 y_1 y_2}{T^4} + \frac{x_2^2 y_1 y_2}{2 T^5} + \\ & \frac{x_1^2 x_2 y_1^2 y_2}{T^4} - \frac{(9 - T) x_1 x_2^2 y_1^2 y_2}{2 T^5} + \frac{3 x_2^3 y_1^2 y_2}{2 T^6} - \frac{x_1^3 x_2 y_1^3 y_2}{6 T^4} - \frac{(-3 + T) x_1^2 x_2^2 y_1^3 y_2}{T^5} + \\ & \frac{3 (-3 + T) x_1 x_2^3 y_1^3 y_2}{2 T^6} - \frac{(-27 + 5 T - T^2 - T^3) x_2^4 y_1^3 y_2}{24 T^7} + \frac{x_1 x_2^2 y_1 y_2^2}{T^5} - \frac{x_2^3 y_1 y_2^2}{3 T^6} - \\ & \frac{x_1^2 x_2^2 y_1^2 y_2^2}{T^5} + \frac{2 x_1 x_2^3 y_1^2 y_2^2}{T^6} - \frac{(12 - T - 5 T^2) x_2^4 y_1^2 y_2^2}{24 T^7} - \frac{x_1 x_2^3 y_1 y_2^3}{6 T^6} - \frac{(-1 - T) x_2^4 y_1 y_2^3}{24 T^7} \Big], \\ & \mathbb{E}_{\{\cdot\} \rightarrow \{1\}} \left[ \sqrt{T}, 0, \inSeries \left[ 0, - \frac{x_1 y_1}{T}, 0, 0 \right] \right], \\ & \mathbb{E}_{\{\cdot\} \rightarrow \{1\}} \left[ \frac{1}{\sqrt{T}}, 0, \inSeries \left[ 0, \frac{x_1 y_1}{T}, - \frac{x_1 y_1}{T^2}, \frac{x_1 y_1}{T^3} \right] \right] \} \end{aligned}$$

```
In[]:= { (R1,2 R4,3 R5,6 // m1,4→1 // m2,5→2 // m3,6→3) ≡ (R2,3 R4,5 R1,6 // m1,4→1 // m2,5→2 // m3,6→3),  
 (R1,2 R̄3,4 // m1,3→1 // m2,4→2) ≡ E{ }→{1,2}[1, 0, eSeries[0]],  
 (CC1 CC̄2 // m1,2→1) ≡ E{ }→{1}[1, 0, eSeries[0]],  
 (CC3 R1,2 // m2,3→2 // m2,1→1) ≡ (CC̄3 R1,2 // m1,3→1 // m1,2→1) }  
Out[ ]= {True, True, True, True}
```

## Some Knot Theory

```
In[]:= Define[Kinki = CC3 R1,2 // m2,3→2 // m2,1→i, Kink̄i = CC3 R̄1,2 // m1,3→1 // m1,2→i]
```

```
In[]:= RVK[pd_PD] := Module[{n, xs, x, rots, front = {0}, k},  
 n = Length@pd; rots = Table[0, {2 n}];  
 xs = Cases[pd, x_X :> {Xp[x[[4]], x[[1]]] PositiveQ@x, Xm[x[[2]], x[[1]]] True}];  
 For[k = 0, k < 2 n, ++k, If[k == 0 ∨ FreeQ[front, -k],  
 front = Flatten[front /. k → (xs /. {  
 Xp[k + 1, l_] | Xm[l_, k + 1] :> {l, k + 1, 1 - l},  
 Xp[l_, k + 1] | Xm[k + 1, l_] :> (++rots[[l]]; {1 - l, k + 1, l})  
 })],  
 Cases[front, k | -k] /. {k, -k} :> --rots[[k + 1]];  
 ]];  
 RVK[xs, rots]];  
 RVK[K_] := RVK[PD[K]];
```

```
In[]:= rot[i_, 0] := E{ }→{i}[1, 0, eSeries@0];  
 rot[i_, n_] := Module[{j},  
 rot[i, n] = If[n > 0, rot[i, n - 1] CCj, rot[i, n + 1] CC̄j] // mi,j→i];
```

```
In[1]:= Z[K_] := Z[RVK@K];
Z[rvk_RVK] := (*Z[rvk] ==*)
Module[{todo, n, rots, g, done, st, cx, g1, i, j, k, k1, k2, k3},
{todo, rots} = List @@ RVK;
AppendTo[rots, 0];
n = Length[todo];
g = E[{} \[Function] {1, 0, eSeries@0}];
done = {0};
st = Range[0, 2 n + 1];
While[{ } != ($M = todo),
{cx} = MaximalBy[todo, Length[done] \[Intersection] {#[[1]], #[[2]], #[[1]] - 1, #[[2]] - 1}] &, 1];
{i, j} = List @@ cx;
g1 = Switch[Head[cx],
Xp, (R[i, j] Kink[k]) // m[j, k \[Function] j],
Xm, (\overline{R}[i, j] Kink[k]) // m[j, k \[Function] j]
];
g1 = (rot[k, rots[[i]]] g1) // m[k, i \[Function] i]; rots[[i]] = 0;
g1 = (g1 rot[k, rots[[i + 1]]]) // m[i, k \[Function] i]; rots[[i + 1]] = 0;
g1 = (rot[k, rots[[j]]] g1) // m[k, j \[Function] j]; rots[[j]] = 0;
g1 = (g1 rot[k, rots[[j + 1]]]) // m[j, k \[Function] j]; rots[[j + 1]] = 0;
g *= g1;
If[MemberQ[done, i], g = g // m[i, i + 1 \[Function] i]; st = st /. st[[i + 2]] \[Rule] st[[i + 1]]];
If[MemberQ[done, i - 1], g = g // m[st[[i]], i \[Function] st[[i]]]; st = st /. st[[i + 1]] \[Rule] st[[i]]];
If[MemberQ[done, j], g = g // m[j, j + 1 \[Function] j]; st = st /. st[[j + 2]] \[Rule] st[[j + 1]]];
If[MemberQ[done, j - 1], g = g // m[st[[j]], j \[Function] st[[j]]]; st = st /. st[[j + 1]] \[Rule] st[[j]]];
done = done \[Union] {i - 1, i, j - 1, j};
todo = DeleteCases[todo, cx]
];
CF /@ (g (* /. {x0 \[Rule] x, y0 \[Rule] y, a0 \[Rule] a}*))
]


```

```
In[2]:= BeginProfile[];
PopupWindow[Button["Show Profile Monitor",
Dynamic[PrintProfile[], UpdateInterval \[Rule] 3, TrackedSymbols \[Rule] {}]]

```

Out[2]= Show Profile Monitor

```
In[3]:= $k = 1
```

Out[3]= 1

```
In[4]:= NewBit[K_] := Module[{Alex = Alexander[K][T]},
T^3 \frac{Alex^2}{T - 1} Z[K][[3, 2]] // Factor]
```

```
In[1]:= NewBit /@ AllKnots[{3, 5}]
```

KnotTheory: Loading precomputed data in PD4Knots`.

$$\text{Out}[1]= \left\{ 2 - T + T^2, (1 + T) (1 - 3 T + T^2), \frac{4 - 3 T + 5 T^2 - 3 T^3 + 3 T^4 - T^5 + T^6}{T^2}, 9 - 11 T + 7 T^2 - T^3 \right\}$$

```
In[2]:= (*Two knots with equal Alexander, new bit does not agree*)
```

```
Alexander[Knot[6, 1]] == Alexander[Knot[9, 46]]
```

```
Timing[NewBit[Knot[6, 1]] == NewBit[Knot[9, 46]]]
```

```
Out[2]= True
```

$$\text{Out}[3]= \{53.1563, 5 - 11 T - T^2 + 3 T^3 == 7 - 21 T + 9 T^2 + T^3\}$$

```
In[4]:= equiv = {Knot[10, 106], Knot[12, NonAlternating, 369]};
```

```
Length@Union[Z /@ equiv]
```

KnotTheory: Loading precomputed data in KnotTheory/12N.dts.

KnotTheory: The GaussCode to PD conversion was written by Siddarth Sankaran at the University of Toronto in the summer of 2005.

```
Out[4]= 1
```

```
In[5]:= equiv =
```

```
{Knot[12, Alternating, 427], Knot[12, Alternating, 435], Knot[12, Alternating, 990]};
```

```
Length@Union[Z /@ equiv]
```

KnotTheory: Loading precomputed data in KnotTheory/12A.dts.

```
Out[5]= 1
```

```
In[6]:= $k = 2
```

```
Out[6]= 2
```

```
In[7]:= equiv = {Knot[10, 106], Knot[12, NonAlternating, 369]};
```

```
Length@Union[Z /@ equiv]
```

```
Out[7]= 2
```

```
In[8]:= equiv =
```

```
{Knot[12, Alternating, 427], Knot[12, Alternating, 435], Knot[12, Alternating, 990]};
```

```
Length@Union[Z /@ equiv]
```

```
In[=]:= PrintProfile[]

Out[=]= ProfileRoot is root. Profiled time: 79.031
( 24) 0.032/ 0.032 above CF
( 237) 1.581/ 6.183 above Zip1
( 237) 0.799/ 38.897 above Zip2
( 237) 28.773/ 33.919 above Zip3
CF: called 3816 times, time in 47.878/47.878
( 24) 0.032/ 0.032 under ProfileRoot
( 1185) 4.602/ 4.602 under Zip1
( 1185) 38.098/ 38.098 under Zip2
( 1422) 5.146/ 5.146 under Zip3
Zip3: called 237 times, time in 28.773/33.919
( 237) 28.773/ 33.919 under ProfileRoot
( 1422) 5.146/ 5.146 above CF
Zip1: called 237 times, time in 1.581/6.183
( 237) 1.581/ 6.183 under ProfileRoot
( 1185) 4.602/ 4.602 above CF
Zip2: called 237 times, time in 0.799/38.897
( 237) 0.799/ 38.897 under ProfileRoot
( 1185) 38.098/ 38.098 above CF
```