

Pensieve header: The 3-Heisenberg Formalism for Θ . Engine modified from pensieve://Project-s/BabyDoPeGDO/Solving_to_k=3.nb, $\$px\$$ formulas modified from pensieve://Talks/Bonn-2505/.

$E[\omega, Q, P, \epsilon\text{Series}]$ represents ωe^{Q+P} , where ω is a scalar, Q is an ϵ -free quadratic, and $P = \sum_{k=0}^{\$k} P[[k]] \epsilon^k$ is a perturbation (it is ill-advised to include ω in P because then it will have log terms).

Scheme: $E[_]$ // $E[_]$ calls FZip or Zip, which are functionally the same. Zip works by handling the quadratic part and calling PZip for the perturbation-only part. PZip works by iteratively solving the synthesis equation. FZip works by encapsulating coefficients, calling Zip, and back-substituting.

```
In[*]:= SetDirectory["C:\\drorbn\\AcademicPensieve\\Talks\\Banff-2607"];
Once[<< KnotTheory`];
```

Loading KnotTheory` version of October 29, 2024, 10:29:52.1301.
Read more at <http://katlas.org/wiki/KnotTheory>.

```
In[*]:= $k = 1;
```

Minor utilities

```
In[*]:= CCF[ $\mathcal{E}_-$ ] := ExpandDenominator@ExpandNumerator@Together[ $\mathcal{E}$ ];
(*CoefficientCanonical Form *)
CF[ $\mathcal{E}_\text{List}$ ] := CF /@  $\mathcal{E}$ ;
CF[ $\mathcal{E}_\text{eSeries}$ ] := CF /@ Take[ $\mathcal{E}$ , $k + 1];
CF[ $\mathcal{E}_-$ ] := Module[{F}, Expand@Collect[ $\mathcal{E}$ , (p | x |  $\pi$  |  $\xi$ ) __, F] /. F -> CCF];
(*CF[ $\mathcal{E}_-$ ] := Module[
  {vs=Cases[ $\mathcal{E}$ , (p | x |  $\pi$  |  $\xi$ ) __,  $\infty$ ]},
  Total[(CCF[ $\#$ ][2]) (Times@@vs $^{\#$ [1])] & /@ CoefficientRules[Expand[ $\mathcal{E}$ ], vs]
];*)
CF[ $\mathcal{E}_\mathbb{E}$ ] := CF /@  $\mathcal{E}$ ;
CF[ $\mathbb{E}_{sp\_}$ [ $\mathcal{E}\_$ ]] := CF /@  $\mathbb{E}_{sp}$ [ $\mathcal{E}\_$ ];
```

```
In[*]:= eSeries /: S1_eSeries  $\equiv$  S2_eSeries :=
  Length[S1] == Length[S2]  $\wedge$  Inner[CF[ $\#$ 1] == CF[ $\#$ 2] &, S1, S2, And];
eSeries[] := eSeries @@ Table[0, $k + 1];
eSeries /: Plus[ $ss\_eSeries$ ] := Module[{l = Min[Length /@ { $ss$ }]},
  eSeries @@ Total[Take[List @@ #, l] & /@ { $ss$ }
];
(*eSeries /: S1_eSeries + S2_eSeries :=
  eSeries @@ Table[S1[[k] + S2[[k]], {k, Min[Length@S1, Length@S2]}];*)
eSeries /: S1_eSeries * S2_eSeries := eSeries @@
  Table[Sum[S1[[j + 1]] * S2[[k - j + 1]], {j, 0, k}], {k, 0, Min[Length@S1, Length@S2] - 1}];
eSeries /: c_ * S_eSeries := (c #) & /@ S;
eSeries /:  $\partial_{vs}$  S_eSeries := (s  $\mapsto$   $\partial_{vs}$  s) /@ S;
```

The Main Program


Variables and their duals:

```
In[*]:= {p*, x*, pi*, xi*} = {pi, xi, p, x};
(vs_List)* := (v -> v*) /@ vs;
(u_{vi_})* := (u*)_{vi};
```

E operations:

```
In[*]:= E /: E[w1_, Q1_, P1_] == E[w2_, Q2_, P2_] := CF[w1 == w2] ^ CF[Q1 == Q2] ^ (P1 == P2);
E /: E[w1_, Q1_, P1_] E[w2_, Q2_, P2_] := E[w1 w2, Q1 + Q2, P1 + P2];
E_{d1 -> r1}[E1S_] == E_{d2 -> r2}[E2S_] ^:= (d1 == d2) ^ (r1 == r2) ^ (E[E1S] == E[E2S]);
E_{d1 -> r1}[E1S_] E_{d2 -> r2}[E2S_] ^:= E_{(d1 U d2) -> (r1 U r2)} @@ (E[E1S] E[E2S]);
E_{dr_}[ES_]_{k_} := E_{dr} @@ E[ES]_{k};
```

```
In[*]:= E_{d1 -> r1}[E1S_] // E_{d2 -> r2}[E2S_] := Module[{is = r1 ^ d2, lvs},
  lvs = Flatten@Table[{X_{v, $ei}, P_{v, $ei}}, {v, 3}, {i, is}];
  E_{(d1 U Complement[d2, is]) -> (r2 U Complement[r1, is])} @@ (Zip_{lvs U lvs}[lvs*.lvs, Times[
    E[E1S] /. Table[{u : x | p}_{v, i} -> u_{v, $ei}, {i, is}],
    E[E2S] /. Table[{u : xi | pi}_{v, i} -> u_{v, $ei}, {i, is}]
  ]])
]
```

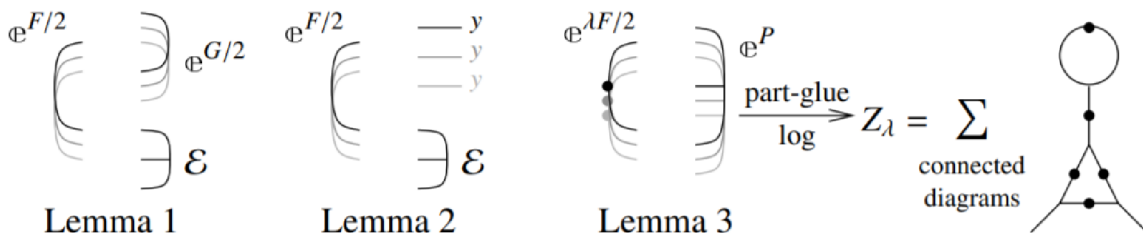

```
In[*]:= Zip_{vs_}[F_, E_] := (*EchoLabel["EZip called with {vs, F, E} = "][{vs, F, E}];*)
  <F, E> // Zip1_{vs} // EZip23_{vs};
Zip_{vs_}[F_, E_] := (*EchoLabel["EZip called with {vs, F, E} = "][{vs, F, E}];*)
  <F, E> // Zip1_{vs} // Zip2_{vs} // Zip3_{vs};
```

Getting rid of the quadratic.

Lemma 1. With convergences left to the reader,

$$\left\langle F : \mathcal{E} e^{\frac{1}{2} \sum_{i,j \in B} G_{ij} z_i z_j} \right\rangle_B = \det(1 - GF)^{-1/2} \left\langle F(1 - GF)^{-1} : \mathcal{E} \right\rangle_B$$

```
In[*]:= Zip1_{ } = Identity;
Zip1_{vs_} @ <mathcal{F}_, \mathbb{E}[\omega_, Q_, P_] > := Module[{I, F, G, u, v},
  (*EchoLabel["EZip1 called with {vs,mathcal{F},omega,Q,P} = "] [{vs,mathcal{F},omega,Q,P}];*)
  I = IdentityMatrix@Length@vs;
  F = Table[\partial_{u,v} \mathcal{F}, {u, vs*}, {v, vs*}];
  G = Table[\partial_{u,v} Q, {u, vs}, {v, vs}];
  {CF[vs*.F.Inverse[I - G.F].vs* / 2],
   \mathbb{E}[CF@PowerExpand@Factor[\omega Det[I - G.F]^{-1/2}], CF[Q - vs.G.vs / 2], P]}
]
```

Getting rid of linear terms.

Lemma 2. $\left\langle F : \mathcal{E}_{\mathbb{E}^{\sum_{i \in B} y_i z_i}} \right\rangle_B = \mathbb{E}^{\frac{1}{2} \sum_{i,j \in B} F_{ij} y_i y_j} \left\langle F : \mathcal{E}_{|z_B \rightarrow z_B + F y_B} \right\rangle_B$.

```
In[*]:= Zip2_{ } = Identity;
Zip2_{vs_} @ <mathcal{F}_, \mathbb{E}[\omega_, Q_, P_] > := Module[{F, Y, u, v},
  (*EchoLabel["EZip2 called with {vs,mathcal{F},omega,Q,P} = "] [{vs,mathcal{F},omega,Q,P}];*)
  F = Table[\partial_{u,v} \mathcal{F}, {u, vs*}, {v, vs*}];
  Y = Table[\partial_v Q, {v, vs}];
  CF / @ <mathcal{F}_, \mathbb{E}[\omega, Q - Y.vs + Y.F.Y / 2, P / . Thread[vs \to vs + F.Y]] >
]
```

Dealing with Feynman diagrams.

Lemma 3. With an extra variable λ , $Z_\lambda := \log[\lambda F : \mathbb{E}^P]_B$ satisfies and is determined by the following PDE / IVP:

$$Z_0 = P \quad \text{and} \quad \partial_\lambda Z_\lambda = \frac{1}{2} \sum_{i,j \in B} F_{ij} \left(\partial_{z_i} \partial_{z_j} Z_\lambda + (\partial_{z_i} Z_\lambda) (\partial_{z_j} Z_\lambda) \right).$$

Note that the power m of λ is at most $k - 1 + \frac{2k+2}{2} = 2k$. We write $Z_\lambda = \sum Z[m] \lambda^m$.

```
In[*]:= Zip3_{vs_} @ <mathcal{F}_, \mathbb{E}[\omega_, Q_, P_] > := Module[{Z, u, v, m, j},
  (*EchoLabel["EZip3 called with {vs,mathcal{F},omega,Q,P} = "] [{vs,mathcal{F},omega,Q,P}];*)
  Z[0] = P;
  For[m = 0, m < 2 $k, ++m,
    Z[m + 1] = CF \left[ \frac{1}{2 (m + 1)} \right.
      Sum[\partial_{u,v} \mathcal{F} (\partial_{u,v} Z[m] + Sum[(\partial_u Z[j]) (\partial_v Z[m - j]), {j, 0, m}]), {u, vs}, {v, vs}]
    ];
  \mathbb{E}[\omega, Q, CF[Sum[Z[m], {m, 0, 2 $k}]] /. Table[v \to 0, {v, vs}]]
]
```

```
In[*]:= EZip23vs@⟨ $\mathcal{F}$ _,  $\mathbb{E}[\omega$ _,  $Q$ _,  $P$ _]⟩ := Module[
  {nP, n $\mathcal{F}$ , nQ, j = 0, ps, c, t, rr = {(*release rules*)}},
  nP = Total[
    CoefficientRules[#, vs] /.
    (ps_ → c_) ⇒ (AppendTo[rr, t[++j] → CF@c]; t[j] (Times @@ vsps))
  ] & /@ P;
  nQ = Total[CoefficientRules[Q, vs] /.
    (ps_ → c_) ⇒ (AppendTo[rr, t[++j] → CF@c]; t[j] (Times @@ vsps))];
  n $\mathcal{F}$  = Total[CoefficientRules[ $\mathcal{F}$ , vs*] /.
    (ps_ → c_) ⇒ (AppendTo[rr, t[++j] → CF@c]; t[j] (Times @@ (vs*)ps))];
  CF[Expand[⟨n $\mathcal{F}$ ,  $\mathbb{E}[\omega$ , nQ, nP]⟩ // Zip2vs // Zip3vs] /. rr]
]
```

```
In[*]:= mi,j→k :=  $\mathbb{E}_{\{i,j\} \rightarrow \{k\}}$  [1,  $\sum_{v=1}^3 (-\xi_{v,i} \pi_{v,j} + (\pi_{v,i} + \pi_{v,j}) p_{v,k} + (\xi_{v,i} + \xi_{v,j}) x_{v,k})$ , eSeries[]]
```

```
In[*]:= ma,b→c
```

Out[*]=

```
 $\mathbb{E}_{\{a,b\} \rightarrow \{c\}}$  [1, p1,c (π1,a + π1,b) + p2,c (π2,a + π2,b) + p3,c (π3,a + π3,b) - π1,b ξ1,a +
  x1,c (ξ1,a + ξ1,b) - π2,b ξ2,a + x2,c (ξ2,a + ξ2,b) - π3,b ξ3,a + x3,c (ξ3,a + ξ3,b), eSeries[0, 0]]
```

Some Knot Theory

```
In[*]:= Kinki := CC3 R1,2 // m2,3→2 // m2,1→i;
   $\overline{\text{Kink}}_i := \text{CC}_3 \overline{R}_{1,2} // m_{1,3 \rightarrow 1} // m_{1,2 \rightarrow i}$ 
```

```
In[*]:= RVK[pd_PD] := Module[{n, xs, x, rots, front = {0}, k},
  n = Length@pd; rots = Table[0, {2 n}];
  xs = Cases[pd, x_X ⇒ {Xp[x[[4]], x[[1]] PositiveQ@x};
  Xm[x[[2]], x[[1]] True}];
  For[k = 0, k < 2 n, ++k, If[k == 0 ∨ FreeQ[front, -k],
    front = Flatten[front /. k → (xs /. {
      Xp[k + 1, L_] | Xm[L_, k + 1] ⇒ {L, k + 1, 1 - L},
      Xp[L_, k + 1] | Xm[k + 1, L_] ⇒ (++rots[[L]]; {1 - L, k + 1, L})
    })],
    Cases[front, k | -k] /. {k, -k} ⇒ --rots[[k + 1]];
  ]];
  RVK[xs, rots];
  RVK[K_] := RVK[PD[K]]];
```

```
In[*]:= rot[i_, 0] :=  $\mathbb{E}_{\{\} \rightarrow \{i\}}$  [1, 0, eSeries[]];
  rot[i_, n_] := Module[{j}, If[n > 0, rot[i, n - 1] CCj, rot[i, n + 1]  $\overline{\text{CC}}_j$ ] // mi,j→i];
```

```

In[*]:= Z[K_] := Z[RVK@K];
Z[rvk_RVK] := (*Z[rvk] =*)
Module[{todo, n, rots,  $\xi$ , done, st, cx,  $\xi$ 1, i, j, k, k1, k2, k3},
  {todo, rots} = List@@rvk;
  AppendTo[rots, 0];
  n = Length[todo];
   $\xi$  =  $\mathbb{E}_{\{\} \rightarrow \{\emptyset\}}$  [1, 0, eSeries[]];
  done = {0};
  st = Range[0, 2 n + 1];
  While[{ } != ($M = todo),
    {cx} = MaximalBy[todo, Length[done  $\cap$  {#[[1]], #[[2]], #[[1]] - 1, #[[2]] - 1}] &, 1];
    {i, j} = List@@cx;
     $\xi$ 1 = Switch[Head[cx],
      Xp, ( $R_{i,j}$  Kinkk) // mj,k→j,
      Xm, ( $\bar{R}_{i,j}$  Kinkk) // mj,k→j
    ];
     $\xi$ 1 = (rot[k, rots[[i]]]  $\xi$ 1) // mk,i→i; rots[[i]] = 0;
     $\xi$ 1 = ( $\xi$ 1 rot[k, rots[[i + 1]]]) // mi,k→i; rots[[i + 1]] = 0;
     $\xi$ 1 = (rot[k, rots[[j]]]  $\xi$ 1) // mk,j→j; rots[[j]] = 0;
     $\xi$ 1 = ( $\xi$ 1 rot[k, rots[[j + 1]]]) // mj,k→j; rots[[j + 1]] = 0;
     $\xi$  *=  $\xi$ 1;
    If[MemberQ[done, i],  $\xi$  =  $\xi$  // mi,i+1→i; st = st /. st[[i + 2]] → st[[i + 1]]];
    If[MemberQ[done, i - 1],  $\xi$  =  $\xi$  // mst[[i],i→st[[i]]; st = st /. st[[i + 1]] → st[[i]]];
    If[MemberQ[done, j],  $\xi$  =  $\xi$  // mj,j+1→j; st = st /. st[[j + 2]] → st[[j + 1]]];
    If[MemberQ[done, j - 1],  $\xi$  =  $\xi$  // mst[[j],j→st[[j]]; st = st /. st[[j + 1]] → st[[j]]];
    done = done  $\cup$  {i - 1, i, j - 1, j};
    todo = DeleteCases[todo, cx]
  ];
  CF /@ ( $\xi$  (* /. {x0→x, y0→y, a0→a} *))
]

```

ρ_1 testing

```
In[*]:= R_{i,j} := E_{\{i,j\}} [ 1, (T_1 - 1) x_{1,j} (p_{1,i} - p_{1,j}),
    eSeries [ 0, \frac{1}{2} (-1 + T_1) x_{1,j}^2 p_{1,i}^2 + x_{1,i} x_{1,j} p_{1,i} p_{1,j} + \frac{1}{2} (1 - 3 T_1) x_{1,j}^2 p_{1,i} p_{1,j} ] ];
R_{i,j} := E_{\{i,j\}} [ 1, (T_1^{-1} - 1) x_{1,j} (p_{1,i} - p_{1,j}), eSeries [ 0,
    - \frac{(-1 + T_1) x_{1,i} x_{1,j} p_{1,i}^2}{T_1^2} - \frac{(1 - T_1) x_{1,j}^2 p_{1,i}^2}{2 T_1^3} - \frac{x_{1,i} x_{1,j} p_{1,i} p_{1,j}}{T_1^2} - \frac{(-1 - T_1) x_{1,j}^2 p_{1,i} p_{1,j}}{2 T_1^3} ] ];
CC_{i,j} := E_{\{i,j\}} [ \sqrt{T_1}, 0, eSeries [ 0, - \frac{x_{1,i} p_{1,i}}{T_1} ] ];
CC_{i,j} := E_{\{i,j\}} [ \frac{1}{\sqrt{T_1}}, 0, eSeries [ 0, \frac{x_{1,i} p_{1,i}}{T_1} ] ];
```

```
In[*]:= $k = 1; {
    {"CC", (CC1 CC2 // m_{1,2 \to 1}) \equiv E_{\{i,j\}} [ 1, 0, eSeries [] ] },
    {"An R1", (CC3 R_{1,2} // m_{2,3 \to 2} // m_{2,1 \to 1}) \equiv (CC3 R_{1,2} // m_{1,3 \to 1} // m_{1,2 \to 1}) },
    {"R2b", (R_{1,2} R_{3,4} // m_{1,3 \to 1} // m_{2,4 \to 2}) \equiv E_{\{i,j\}} [ 1, 0, eSeries [] ] },
    {"R3", (R_{1,2} R_{4,3} R_{5,6} // m_{1,4 \to 1} // m_{2,5 \to 2} // m_{3,6 \to 3}) \equiv (R_{2,3} R_{4,5} R_{1,6} // m_{1,4 \to 1} // m_{2,5 \to 2} // m_{3,6 \to 3}) }
}
```

```
Out[*]= { {CC, True}, {An R1, True}, {R2b, True}, {R3, True} }
```

```
In[*]:= NewBit[K_] := Module [ {Alex = Alexander[K][T_1]},
    T_1^3 \frac{Alex^2}{T_1 - 1} Z[K][[3, 2]] // Factor ]
```

```
In[*]:= NewBit /@ AllKnots [ {3, 5} ]
```

KnotTheory: Loading precomputed data in PD4Knots`.

```
Out[*]= { 2 - T_1 + T_1^2, (1 + T_1) (1 - 3 T_1 + T_1^2), \frac{4 - 3 T_1 + 5 T_1^2 - 3 T_1^3 + 3 T_1^4 - T_1^5 + T_1^6}{T_1^2}, 9 - 11 T_1 + 7 T_1^2 - T_1^3 }
```

In pensieve://Projects/BabyDoPeGDO/Solving to \$k=3.nb that was

$$\left\{ 2 - T + T^2, (1 + T) (1 - 3 T + T^2), \frac{4 - 3 T + 5 T^2 - 3 T^3 + 3 T^4 - T^5 + T^6}{T^2}, 9 - 11 T + 7 T^2 - T^3 \right\}$$

And now θ

$$\begin{aligned}
In[*]:= & \quad T_3 = T_1 T_2; \\
& \quad \mathcal{L}[X_{i,j}[s_-]] := T_3^s \mathbb{E} \left[\text{CF} @ \left\{ \right. \right. \\
& \quad \quad \sum_{v=1}^3 \left(x_{vi} (p_{vi^+} - p_{vi}) + x_{vj} (p_{vj^+} - p_{vj}) + (T_v^s - 1) x_{vi} (p_{vi^+} - p_{vj^+}) \right), \\
& \quad \quad (T_1^s - 1) p_{3j} x_{1i} (T_2^s x_{2i} - x_{2j}), \\
& \quad \quad \epsilon s (T_3^s - 1) p_{1j} (p_{2i} - p_{2j}) x_{3i} / (T_2^s - 1), \\
& \quad \quad \epsilon s \left(1/2 + T_2^s p_{1i} p_{2j} x_{1i} x_{2i} - p_{1i} p_{2j} x_{1i} x_{2j} - p_{3i} x_{3i} - (T_2^s - 1) p_{2j} p_{3i} x_{2i} x_{3i} + \right. \\
& \quad \quad \quad (T_3^s - 1) p_{2j} p_{3j} x_{2i} x_{3i} + 2 p_{2j} p_{3i} x_{2j} x_{3i} + p_{1i} p_{3j} x_{1i} x_{3j} - p_{2i} p_{3j} x_{2i} x_{3j} - T_2^s p_{2j} p_{3j} x_{2i} x_{3j} + \\
& \quad \quad \quad \left. \left((T_1^s - 1) p_{1j} x_{1i} (T_2^{2s} p_{2j} x_{2i} - T_2^s p_{2j} x_{2j}) - (T_2^s + 1) (T_3^s - 1) p_{3j} x_{3i} + T_2^s p_{3j} x_{3j} \right) + \right. \\
& \quad \quad \quad \left. \left. (T_3^s - 1) p_{3j} x_{3i} (1 - T_2^s p_{1i} x_{1i} + p_{2i} x_{2j} + (T_2^s - 2) p_{2j} x_{2j}) \right) / (T_2^s - 1) \right\} \right]
\end{aligned}$$

$$In[*]:= \quad \mathcal{L}[C_{i-}[\varphi_-]] := T_3^\varphi \mathbb{E} \left[\left\{ \sum_{v=1}^3 x_{vi} (p_{vi^+} - p_{vi}), \epsilon \varphi (p_{3i} x_{3i} - 1/2) \right\} \right]$$

$$\begin{aligned}
In[*]:= & \quad \bar{R}_{i,j} := \text{CF} \left[\mathcal{L}[X_{i,j}[1]] / . \omega_- \mathbb{E}[\{Q_-, P\theta_-, P1a_-, P1b_-\}] \Rightarrow \mathbb{E}_{\{\} \rightarrow \{i,j\}} \left[\right. \right. \\
& \quad \quad \omega, \sum_{v=1}^3 \left((T_v - 1) x_{v,j} (p_{v,i} - p_{v,j}) \right), \\
& \quad \quad \epsilon \text{Series}[P\theta, P1a + P1b / . \epsilon \rightarrow 1] \\
& \quad \quad \left. \left. \right] \right];
\end{aligned}$$

$$\begin{aligned}
& \quad \bar{R}_{i,j} := \text{CF} \left[\mathcal{L}[X_{i,j}[-1]] / . \omega_- \mathbb{E}[\{Q_-, P\theta_-, P1a_-, P1b_-\}] \Rightarrow \mathbb{E}_{\{\} \rightarrow \{i,j\}} \left[\right. \right. \\
& \quad \quad \omega, \sum_{v=1}^3 \left((T_v^{-1} - 1) x_{v,j} (p_{v,i} - p_{v,j}) \right), \\
& \quad \quad \epsilon \text{Series}[P\theta, P1a + P1b / . \epsilon \rightarrow 1] \\
& \quad \quad \left. \left. \right] \right];
\end{aligned}$$

$$\begin{aligned}
& \quad \bar{C}C_{i-} := \text{CF} \left[\mathcal{L}[C_i[1]] / . \omega_- \mathbb{E}[\{Q_-, P_-\}] \Rightarrow \mathbb{E}_{\{\} \rightarrow \{i\}} \left[\right. \right. \\
& \quad \quad \omega, \theta, \epsilon \text{Series}[\theta, P / . \epsilon \rightarrow 1] \\
& \quad \quad \left. \left. \right] \right];
\end{aligned}$$

$$\begin{aligned}
& \quad \bar{C}\bar{C}_{i-} := \text{CF} \left[\mathcal{L}[C_i[-1]] / . \omega_- \mathbb{E}[\{Q_-, P_-\}] \Rightarrow \mathbb{E}_{\{\} \rightarrow \{i\}} \left[\right. \right. \\
& \quad \quad \omega, \theta, \epsilon \text{Series}[\theta, P / . \epsilon \rightarrow 1] \\
& \quad \quad \left. \left. \right] \right];
\end{aligned}$$

$$In[*]:= \quad \bar{R}_{i,j} // \text{CF}$$

$$\begin{aligned}
Out[*]= & \quad \mathbb{E}_{\{\} \rightarrow \{i,j\}} \left[\frac{1}{T_1 T_2}, \frac{(1 - T_1) p_{1,i} x_{1,j}}{T_1} + \frac{(-1 + T_1) p_{1,j} x_{1,j}}{T_1} + \right. \\
& \quad \quad \frac{(1 - T_2) p_{2,i} x_{2,j}}{T_2} + \frac{(-1 + T_2) p_{2,j} x_{2,j}}{T_2} + \frac{(1 - T_1 T_2) p_{3,i} x_{3,j}}{T_1 T_2} + \frac{(-1 + T_1 T_2) p_{3,j} x_{3,j}}{T_1 T_2}, \\
& \quad \quad \left. \epsilon \text{Series} \left[\frac{(1 - T_1) p_{3,j} x_{1,i} x_{2,i}}{T_1 T_2} + \frac{(-1 + T_1) p_{3,j} x_{1,i} x_{2,j}}{T_1} \right] \right]
\end{aligned}$$

$$In[*]:= \quad \bar{C}C_{i-} // \text{CF}$$

$$Out[*]= \quad \mathbb{E}_{\{\} \rightarrow \{1\}} [T_1 T_2, \theta, \epsilon \text{Series}[\theta]]$$

```

In[*]:=  $\overline{CC}_1 // CF$ 
Out[*]=

$$\mathbb{E}_{\{\} \rightarrow \{1\}} \left[ \frac{1}{T_1 T_2}, \theta, \text{eSeries}[\theta] \right]$$


In[*]:= $k = \theta; \{
  {"CC", (CC1  $\overline{CC}_2 // m_{1,2 \rightarrow 1}$ )  $\equiv \mathbb{E}_{\{\} \rightarrow \{1\}} [1, \theta, \text{eSeries}[]]$ },
  {"An R1", (CC3  $R_{1,2} // m_{2,3 \rightarrow 2} // m_{2,1 \rightarrow 1}$ )  $\equiv (\overline{CC}_3 R_{1,2} // m_{1,3 \rightarrow 1} // m_{1,2 \rightarrow 1})$ },
  {"R2b", ( $R_{1,2} \overline{R}_{3,4} // m_{1,3 \rightarrow 1} // m_{2,4 \rightarrow 2}$ )  $\equiv \mathbb{E}_{\{\} \rightarrow \{1,2\}} [1, \theta, \text{eSeries}[]]$ },
  {"R3", ( $R_{1,2} R_{4,3} R_{5,6} // m_{1,4 \rightarrow 1} // m_{2,5 \rightarrow 2} // m_{3,6 \rightarrow 3}$ )  $\equiv (R_{2,3} R_{4,5} R_{1,6} // m_{1,4 \rightarrow 1} // m_{2,5 \rightarrow 2} // m_{3,6 \rightarrow 3})$  }
}

Out[*]=
{ {CC, True}, {An R1,  $\frac{(1 - T_1 - T_2^2 + T_1 T_2^2) p_{3,1} x_{1,1} x_{2,1}}{T_2} = (T_1 - T_1^2 - T_1 T_2^2 + T_1^2 T_2^2) p_{3,1} x_{1,1} x_{2,1}$ },
  {R2b,  $\frac{(1 - T_1 - T_1 T_2 + T_1^2 T_2) p_{3,1} x_{1,1} x_{2,1}}{T_1 T_2} +$ 

$$(1 - T_1 - T_2 + T_1 T_2) p_{3,2} x_{1,1} x_{2,1} + \frac{(T_2 - 2 T_1 T_2 + T_1^2 T_2) p_{3,2} x_{1,2} x_{2,1}}{T_1} +$$


$$\frac{(-1 + T_1 + T_1 T_2 - T_1^2 T_2) p_{3,1} x_{1,1} x_{2,2}}{T_1} + \frac{(1 - T_1 + T_2 - T_1 T_2 - 2 T_2^2 + 2 T_1 T_2^2) p_{3,2} x_{1,1} x_{2,2}}{T_2} +$$


$$\frac{(-1 + 2 T_1 - T_1^2 - T_2 + 2 T_1 T_2 - T_1^2 T_2 + T_2^2 - 2 T_1 T_2^2 + T_1^2 T_2^2) p_{3,2} x_{1,2} x_{2,2}}{T_1 T_2} = \theta$$
},
  {R3,  $(-T_2 + T_1 T_2) p_{3,2} x_{1,1} x_{2,1} + (-T_2 + T_1 T_2) p_{3,3} x_{1,1} x_{2,1} + (-T_1 T_2 + 2 T_1^2 T_2 - T_1^3 T_2) p_{3,2} x_{1,3} x_{2,1} +$ 

$$(1 - T_1) p_{3,2} x_{1,1} x_{2,2} + (-T_2 + T_1 T_2 + T_1 T_2^2 - T_1^2 T_2^2) p_{3,1} x_{1,2} x_{2,2} + (-T_1 T_2^2 + T_1^2 T_2^2) p_{3,3} x_{1,2} x_{2,2} +$$


$$(T_1 - 2 T_1^2 + T_1^3) p_{3,2} x_{1,3} x_{2,2} + (1 - T_1 - T_2 + T_1 T_2 - T_2^2 + T_1 T_2^2 + T_2^3 - T_1 T_2^3) p_{3,2} x_{1,1} x_{2,3} +$$


$$(T_2 - T_1 T_2) p_{3,3} x_{1,1} x_{2,3} + (1 - T_1 - T_1 T_2 + T_1^2 T_2) p_{3,1} x_{1,2} x_{2,3} + (T_1 T_2 - T_1^2 T_2) p_{3,3} x_{1,2} x_{2,3} +$$


$$(T_1 - 2 T_1^2 + T_1^3 - T_1 T_2 + 2 T_1^2 T_2 - T_1^3 T_2 - T_1 T_2^2 + 2 T_1^2 T_2^2 - T_1^3 T_2^2 + T_1 T_2^3 - 2 T_1^2 T_2^3 + T_1^3 T_2^3) p_{3,2} x_{1,3} x_{2,3} =$$


$$(-2 T_2 + 2 T_1 T_2 + T_1 T_2^2 - T_1^2 T_2^2) p_{3,2} x_{1,1} x_{2,1} + (-T_1 T_2^2 + T_1^2 T_2^2) p_{3,3} x_{1,1} x_{2,1} +$$


$$(-T_2 + 2 T_1 T_2 - T_1^2 T_2 + T_1 T_2^2 - 2 T_1^2 T_2^2 + T_1^3 T_2^2) p_{3,2} x_{1,2} x_{2,1} + (-T_1 T_2^2 + 2 T_1^2 T_2^2 - T_1^3 T_2^2) p_{3,3} x_{1,2} x_{2,1} +$$


$$(1 - T_1 - T_2 + T_1 T_2 + T_2^2 - T_1^2 T_2^2 - T_1 T_2^3 + T_1^2 T_2^3) p_{3,2} x_{1,1} x_{2,2} + (-T_1 T_2^2 + T_1^2 T_2^2 + T_1 T_2^3 - T_1^2 T_2^3) p_{3,3}$$


$$x_{1,1} x_{2,2} + (-T_2 + 2 T_1 T_2 - T_1^2 T_2 + T_2^2 - T_1 T_2^2 - T_1^2 T_2^2 + T_1^3 T_2^2 - T_1 T_2^3 + 2 T_1^2 T_2^3 - T_1^3 T_2^3) p_{3,2} x_{1,2} x_{2,2} +$$


$$(-2 T_1 T_2^2 + 3 T_1^2 T_2^2 - T_1^3 T_2^2 + T_1 T_2^3 - 2 T_1^2 T_2^3 + T_1^3 T_2^3) p_{3,3} x_{1,2} x_{2,2} +$$


$$(1 - T_1 - T_1 T_2 + T_1^2 T_2) p_{3,2} x_{1,1} x_{2,3} + (T_1 T_2 - T_1^2 T_2) p_{3,3} x_{1,1} x_{2,3} +$$


$$(1 - 2 T_1 + T_1^2 - T_1 T_2 + 2 T_1^2 T_2 - T_1^3 T_2) p_{3,2} x_{1,2} x_{2,3} + (2 T_1 T_2 - 3 T_1^2 T_2 + T_1^3 T_2) p_{3,3} x_{1,2} x_{2,3} \}$$


```

In[*]:= $\$k = 0;$

$R_{1,2}$ // CF

$\bar{R}_{3,4}$ // CF

$(R_{1,2} \bar{R}_{3,4} // m_{1,3 \rightarrow 1} // m_{2,4 \rightarrow 2})$

Out[*]=

$$\mathbb{E}_{\{\} \rightarrow \{1,2\}} [T_1 T_2, (-1 + T_1) p_{1,1} x_{1,2} + (1 - T_1) p_{1,2} x_{1,2} + (-1 + T_2) p_{2,1} x_{2,2} + (1 - T_2) p_{2,2} x_{2,2} + (-1 + T_1 T_2) p_{3,1} x_{3,2} + (1 - T_1 T_2) p_{3,2} x_{3,2}, \in \text{Series} [(-T_2 + T_1 T_2) p_{3,2} x_{1,1} x_{2,1} + (1 - T_1) p_{3,2} x_{1,1} x_{2,2}]]$$

Out[*]=

$$\mathbb{E}_{\{\} \rightarrow \{3,4\}} \left[\frac{1}{T_1 T_2}, \frac{(1 - T_1) p_{1,3} x_{1,4}}{T_1} + \frac{(-1 + T_1) p_{1,4} x_{1,4}}{T_1} + \frac{(1 - T_2) p_{2,3} x_{2,4}}{T_2} + \frac{(-1 + T_2) p_{2,4} x_{2,4}}{T_2} + \frac{(1 - T_1 T_2) p_{3,3} x_{3,4}}{T_1 T_2} + \frac{(-1 + T_1 T_2) p_{3,4} x_{3,4}}{T_1 T_2}, \in \text{Series} \left[\frac{(1 - T_1) p_{3,4} x_{1,3} x_{2,3}}{T_1 T_2} + \frac{(-1 + T_1) p_{3,4} x_{1,3} x_{2,4}}{T_1} \right] \right]$$

Out[*]=

$$\mathbb{E}_{\{\} \rightarrow \{1,2\}} \left[1, 0, \in \text{Series} \left[\frac{(1 - T_1 - T_1 T_2 + T_1^2 T_2) p_{3,1} x_{1,1} x_{2,1}}{T_1 T_2} + \frac{(1 - T_1 - T_2 + T_1 T_2) p_{3,2} x_{1,1} x_{2,1} + \frac{(T_2 - 2 T_1 T_2 + T_1^2 T_2) p_{3,2} x_{1,2} x_{2,1}}{T_1}}{T_1} + \frac{(-1 + T_1 + T_1 T_2 - T_1^2 T_2) p_{3,1} x_{1,1} x_{2,2}}{T_1} + \frac{(1 - T_1 + T_2 - T_1 T_2 - 2 T_2^2 + 2 T_1 T_2^2) p_{3,2} x_{1,1} x_{2,2}}{T_2} + \frac{(-1 + 2 T_1 - T_1^2 - T_2 + 2 T_1 T_2 - T_1^2 T_2 + T_2^2 - 2 T_1 T_2^2 + T_1^2 T_2^2) p_{3,2} x_{1,2} x_{2,2}}{T_1 T_2} \right] \right]$$